



International Council on Systems Engineering
A better world through a systems approach

Welcome to the INCOSE Webinar Series

Wednesday, 6 November 2024 – Webinar 177

Thank you to our 2024 Webinar Sponsor!



INCOSE Webinar 177:

Traceability - The Threads That Link SE Artifacts Together Across the Lifecycle

Presented by Lou Wheatcraft



About the INCOSE Webinar Series

- Piloted in 2008
- A virtual offering aimed to provide relevant technical information and topics on systems engineering, on a regular basis and on an easy to access platform
- Held once a month (normally on the 3rd Wednesday)
- <https://www.incose.org/events>

International Symposium (IS)

2-6 July 2024 - Dublin, Ireland

[FIND OUT MORE!](#)



Questions? Comments? Suggestions?
Email us at webinars@incose.net!



Webinars & SEP PDU* Credits

More information can be found
on [Renewing Certification
\(incose.org\)](http://Renewing%20Certification%20(incose.org))

*PDU – Professional Development Unit

You can claim 1 PDU credit towards your INCOSE Systems Engineering Professional (SEP) renewal by attending this entire webinar.

**Claim
PDUs**

**Eligible Sources
To Claim PDU**

- Live attendance at the webinar: "Attend non-peer-reviewed Professional Technical Society event."
- Watching a recording of the webinar: "Consume SE-related media, including journal article, book, video, or audio."

INCOSE webinars may also apply to the PDU requirements of other organizations, depending on the subject matter.

**Claim PDUs for
Other certifications**

Webinar Cadence

- ✓ **Welcome** (2-5 minutes)
- **Presentation** (40-45 minutes)
- Please use Q&A feature via Zoom
to enter your questions
- **Q&A Session** (10 minutes)
- Questions will be selected and
asked by the Host
- **Brief Closing** (2-5 minutes)

This Webinar is being recorded.

The full recording and slide deck will be made available to all INCOSE members and CAB Associates within 10-12 business days from original air date in the Professional Development Portal (PDP).

Questions? Comments? Suggestions?
Email us at webinars@incose.net!

INCOSE Webinar 177:

Traceability - The Threads That Link SE Artifacts Together Across the Lifecycle

Presented by Lou Wheatcraft



Traceability

The Threads That Link SE Artifacts Together Across the Lifecycle.




Lou Wheatcraft, Senior Consultant, Wheatland Consulting
Wheatland.consulting@gmail.com

Other Sources Concerning Traceability



The INCOSE SE HB v5, Section 3.2.3 greatly expanded the coverage of Traceability.

Members of the RWG coauthored a paper “Traceability – A vision for now and tomorrow” with the Configuration Management (CM) WG that was presented at IS2024 by Adriana D’Souza

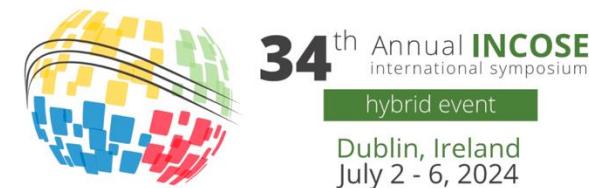

34th Annual INCOSE international symposium
hybrid event
Dublin, Ireland
July 2 - 6, 2024



Traceability – A vision for now and tomorrow

Adriana D’Souza (Airbus) ; Louis S. Wheatcraft (Wheatland Consulting, LLC); Tami Katz (BAE Systems, Inc.); A. Larry Gurule (i-Infusion/CMPIC/SAE G33); Michael J. Ryan (Capability Associates Pty Ltd); Aleksander Przybylo (Boeing)



2-6 July 2024 [#INCOSEIS](http://www.incose.org/symp2024) 1



Needs and Requirements Manual (NRM)




- The NRM is the RWG flagship product, V1 released in January 2022
- V1.1 minor updates in May 2022 to shorten title, add subtitle, and align with other RWG products
- Content aligns with, and expands, the INCOSE SE Handbook version 5 material.
- The NRM has been updated to Version 2, which is has been published by Wiley November 2024.

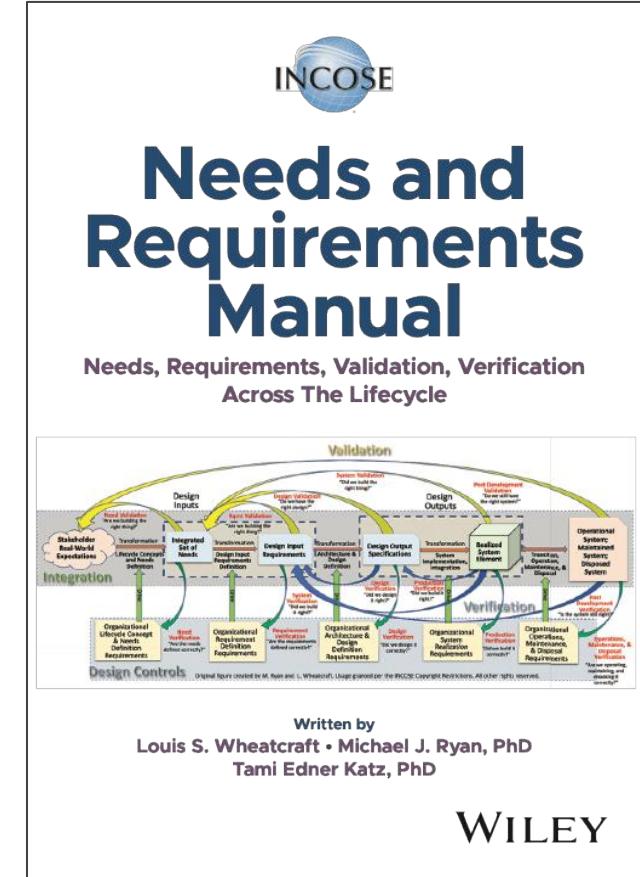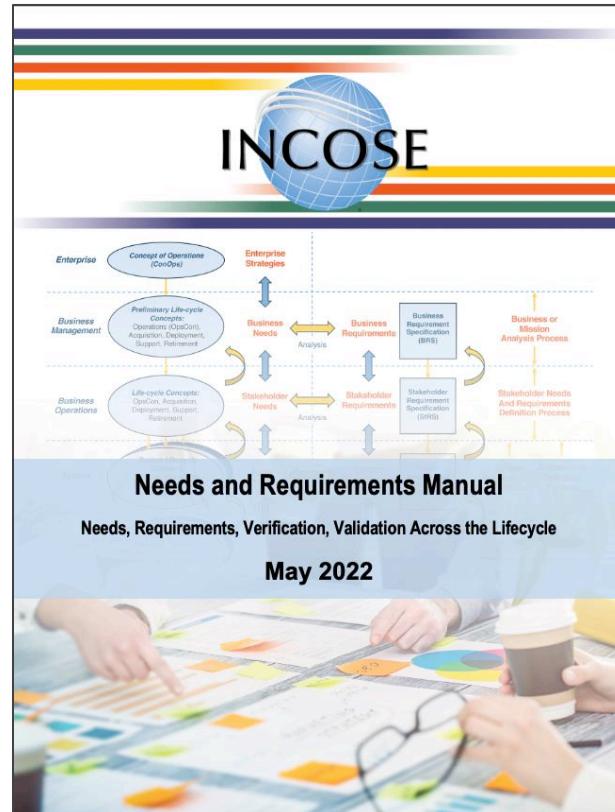

<https://www.wiley.com/en-us/INCOSE+Needs+and+Requirements+Manual%3A+Needs%2C+Requirements%2C+Verification%2C+Validation+Across+the+Lifecycle-p-00386271>

MBSE - A Data-Centric Practice of SE

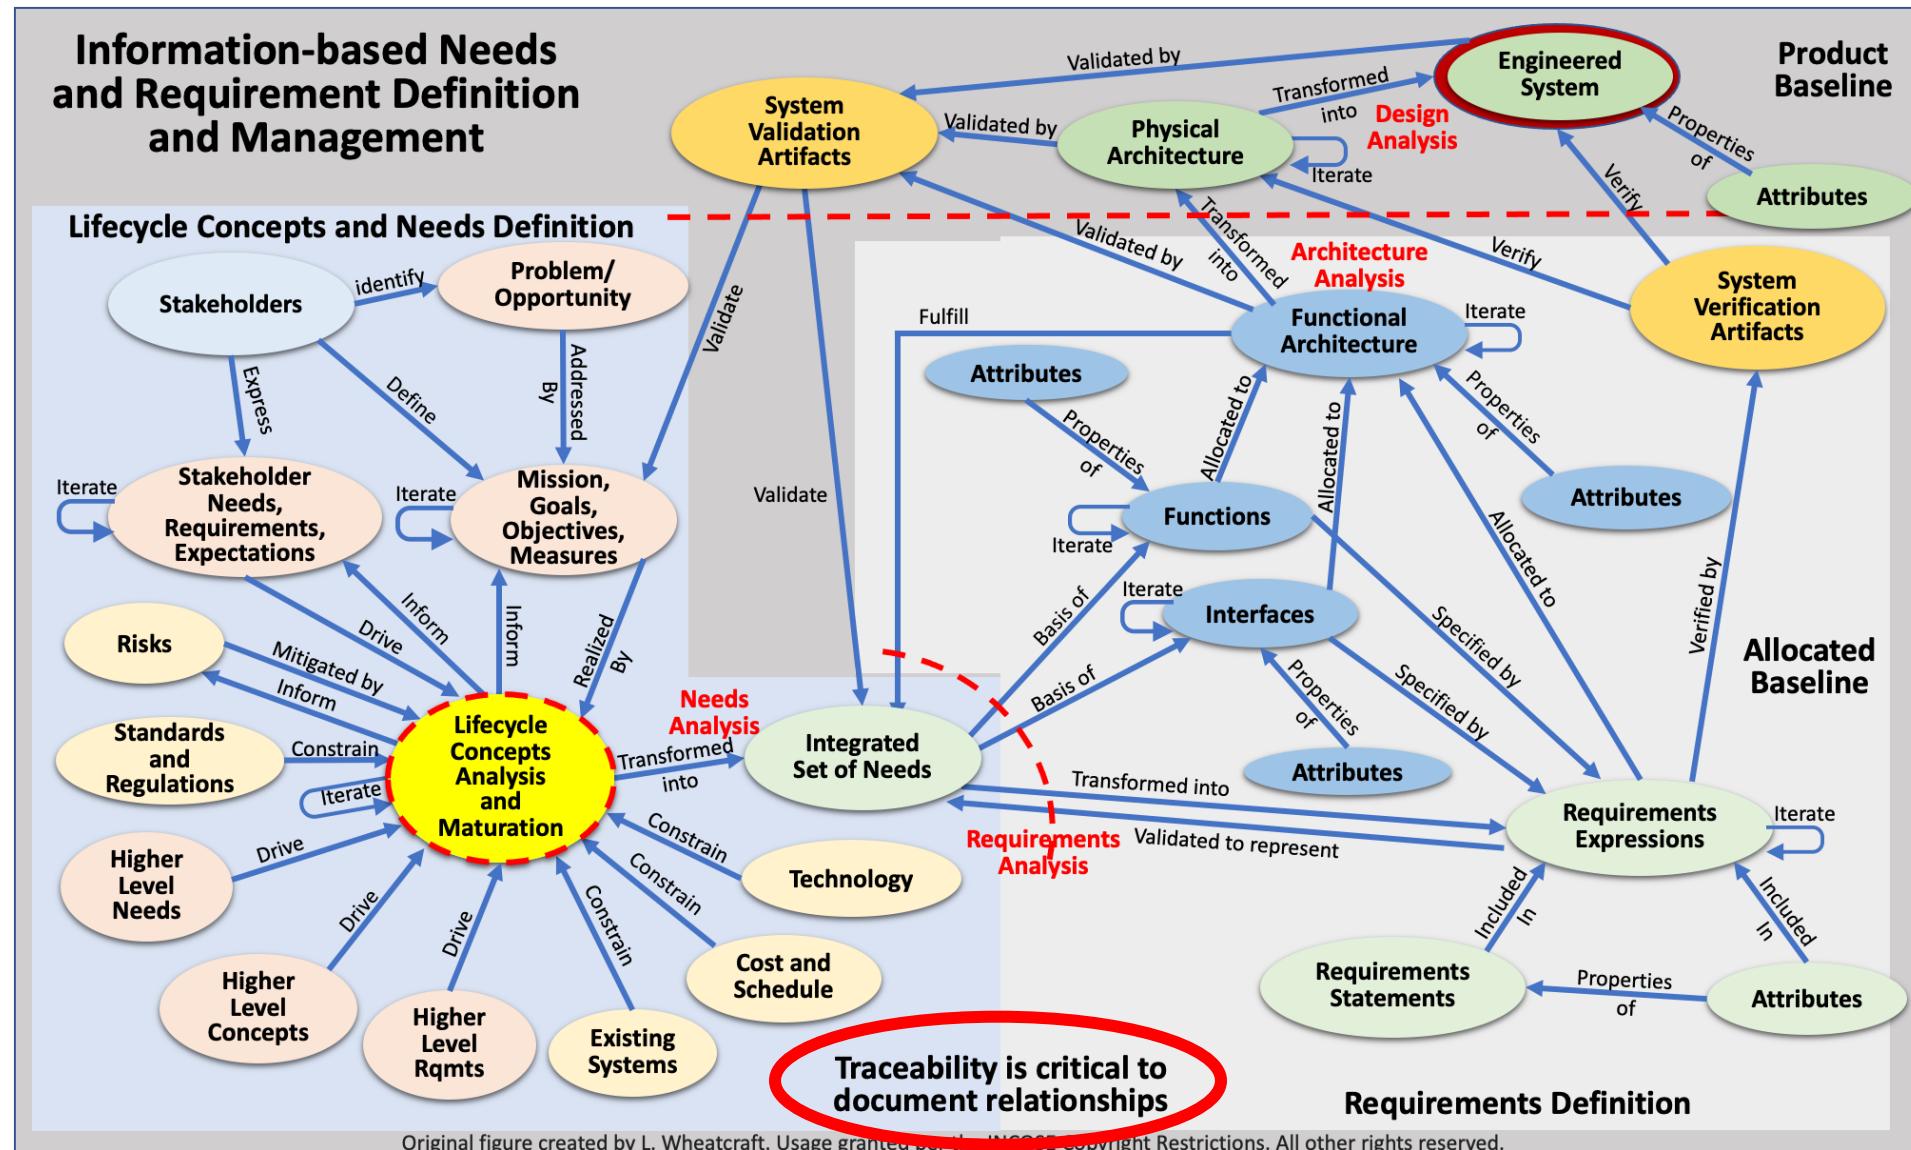

Original figure created by L. Wheatcraft. Usage granted per the WCCCB copyright Restrictions. All other rights reserved.

Showing Compliance with Standards & Regulations



- Many standards and regulations require traceability to be established across the lifecycle of the product/system;
 - ARP4754A Section 5.3.1.1 requires requirements dealing with safety to be “uniquely identified and traceable” to “ensure visibility of the safety requirements at the software and electronic hardware design level.”
 - ISO26262 Section 6.4.3.2 requires “Safety requirements shall be traceable with a reference being made to:
 - a) each source of a safety requirement at the next upper hierarchical level;
 - b) each derived safety requirement at the next lower hierarchical level, or to its realization in the design; and
 - c) the verification specification in accordance with 9.4.2.”
 - USC Title 21 Part 820 requires developing organizations of medical devices to develop and maintain a Device History File (DHF) that “shall contain or reference the records necessary to demonstrate that the design was developed in accordance with the approved design plan and the requirements of this part.” **Traceability is a critical part of the DHF.**
 - ISO13485 Section 7.3.2 requires organizations to document “methods to ensure traceability of design and development outputs to design and development inputs.”

ARP4754, “Guidelines for Development of Civil Aircraft and Systems”; ISO26262, “Road Vehicles — Functional Safety”; USC Title 21 Part 820, “Quality System Regulation” for Medical Devices ; and ISO13485, “Medical Devices - Quality Management Systems - Requirements for Regulatory Purposes”



Traceability Defined

Traceability



- Individual sets of lifecycle concepts, needs, requirements (CNR), design output specifications, system validation artifacts, and system verification artifacts do not exist in isolation.
 - Rather they represent a multi-level, “spider web” or “tapestry” of relationships that represents a data and information model of the integrated system.
 - These relationships are documented via traceability connections (i.e., links) that allow the relationships to be traced between the entities that are linked both vertically across levels and horizontally across the lifecycle.


This is the fundamental concept of traceability.

- *Traceability* is the ability to establish an association or relationship between two or more entities and to track entities from their origin to the activities and deliverables that satisfy them, as well as assess the effects on artifacts across the lifecycle when change occurs.
- Traceability can be “bidirectional”, “unidirectional”, “horizontal”, or “vertical”.

Bidirectional traceability




- **Bidirectional traceability** is the ability to establish a two-way link between entities such that each has knowledge of the other.
 - Enables practitioners to move forward, backward, or up and down digital threads (tapestry) that result from establishing bidirectional traceability.
 - Although the relationship is created in both directions, it is not the same relationship.
 - For example: One direction should be indicated as “traced from” or “traced to”. Similarly, “satisfies” and “satisfied by” are two different directions within a bidirectional “satisfy” relationship.

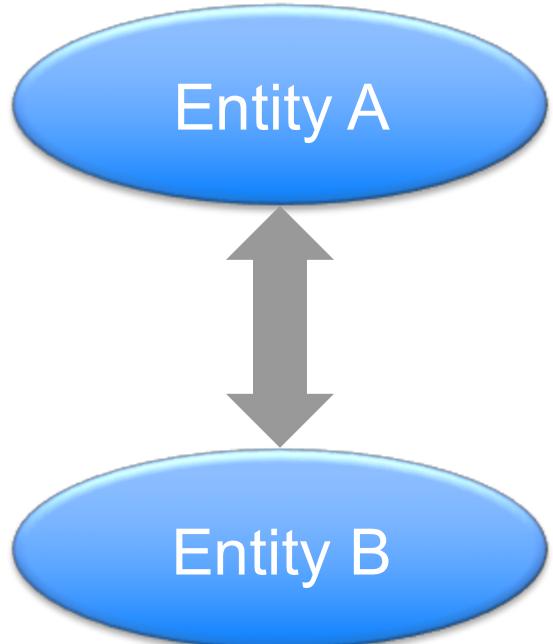

Unidirectional Traceability




- **Unidirectional traceability** is the ability to establish a one-way trace from one entity to another, where the source entity has no knowledge of the receiving entity.
 - Entity B establishes a trace to entity A, but entity A has no knowledge that entity B has a trace to it. Examples include:
 - A GPS satellite does not know the receivers, but the receivers know about the GPS.
 - Broadcasting is also unidirectional as the receivers know the broadcaster, but the broadcaster does not know its receivers.

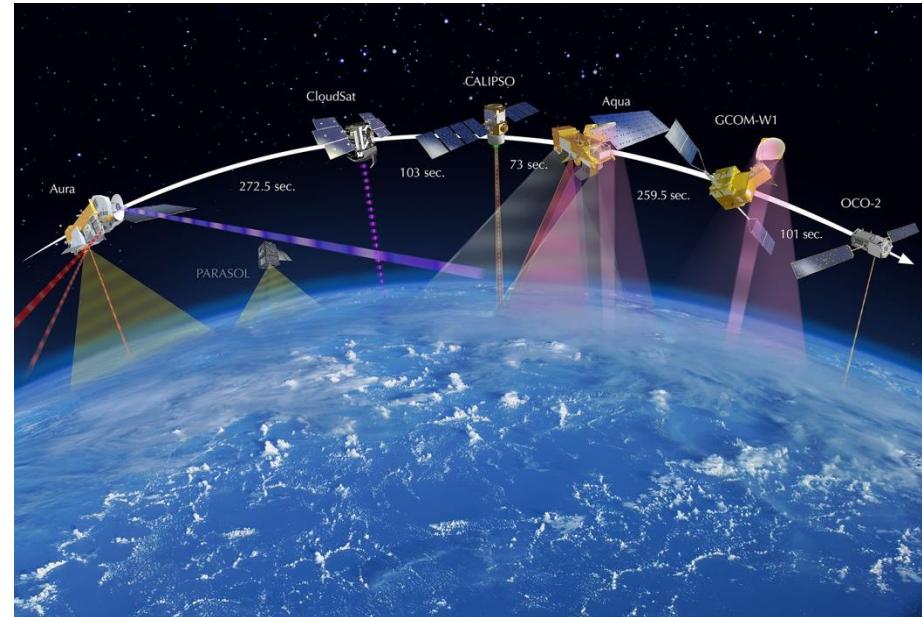


Horizontal Traceability



- **Horizontal traceability** involves the forward and backward traceability between entities across the SOI lifecycle.
- Horizontal traceability links data, information, and artifacts generated in one lifecycle process activity to data, information, and artifacts generated in other lifecycle process activities, resulting in a “digital thread” connecting these data, information, and artifacts across the lifecycle.

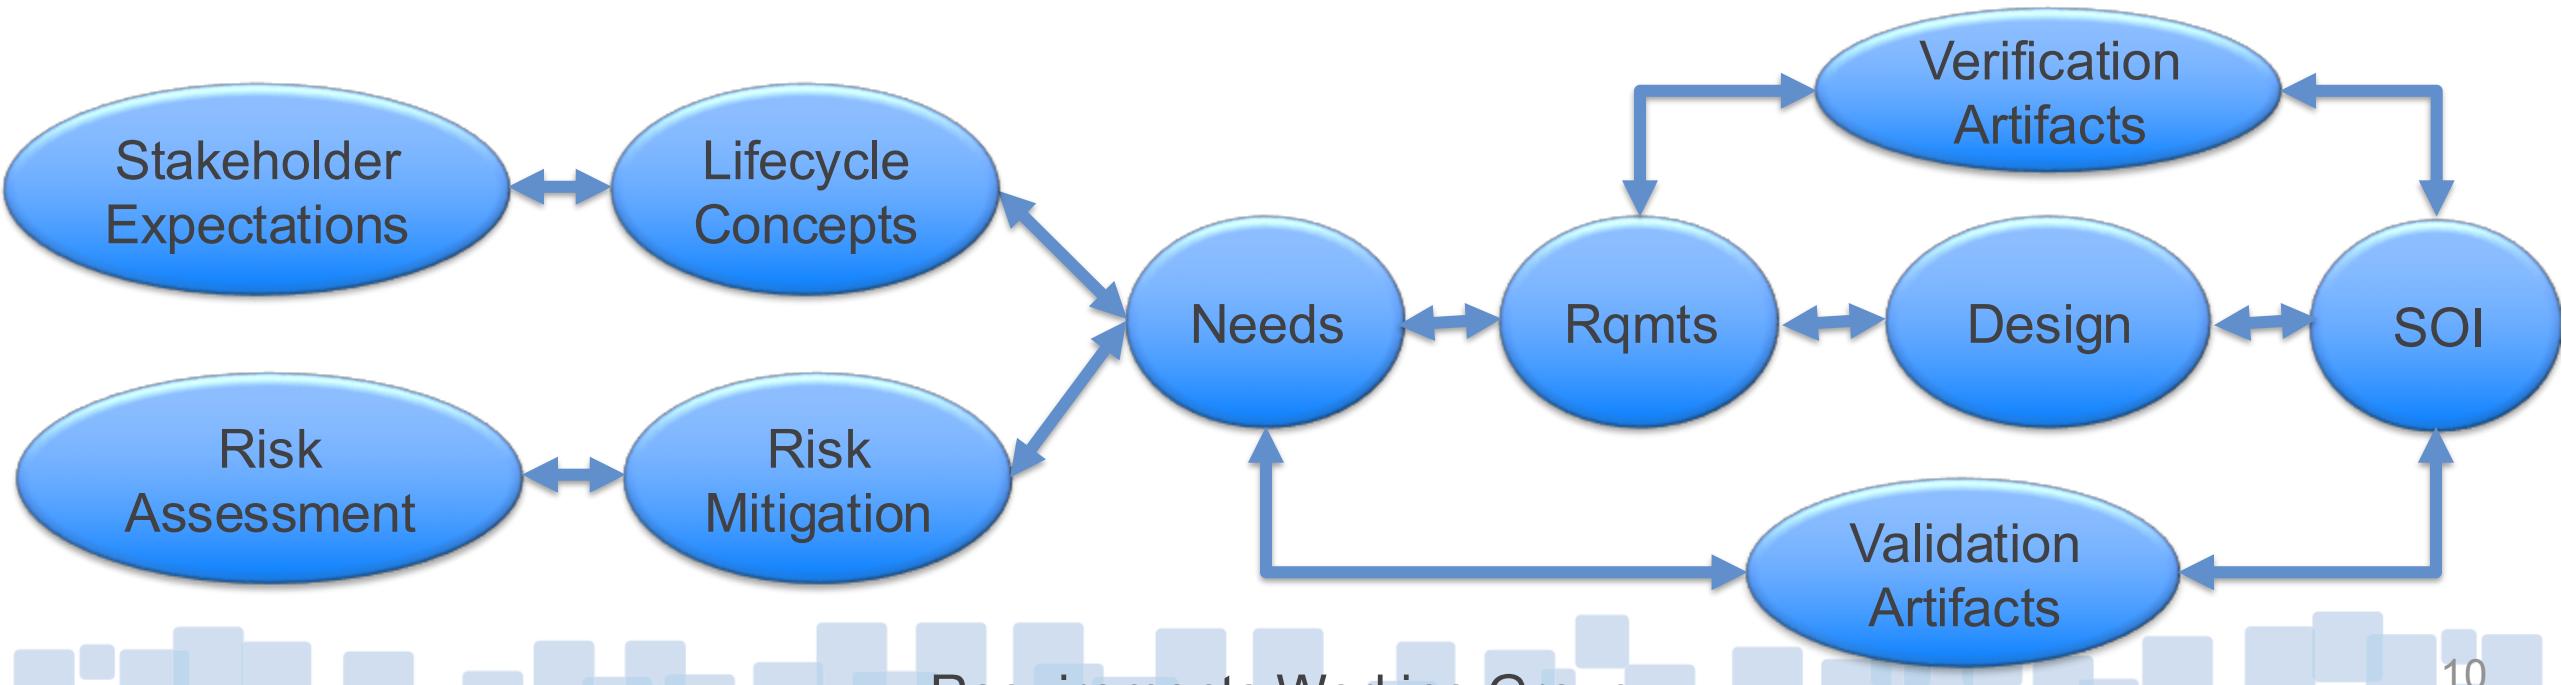

Horizontal Traceability Across the Lifecycle

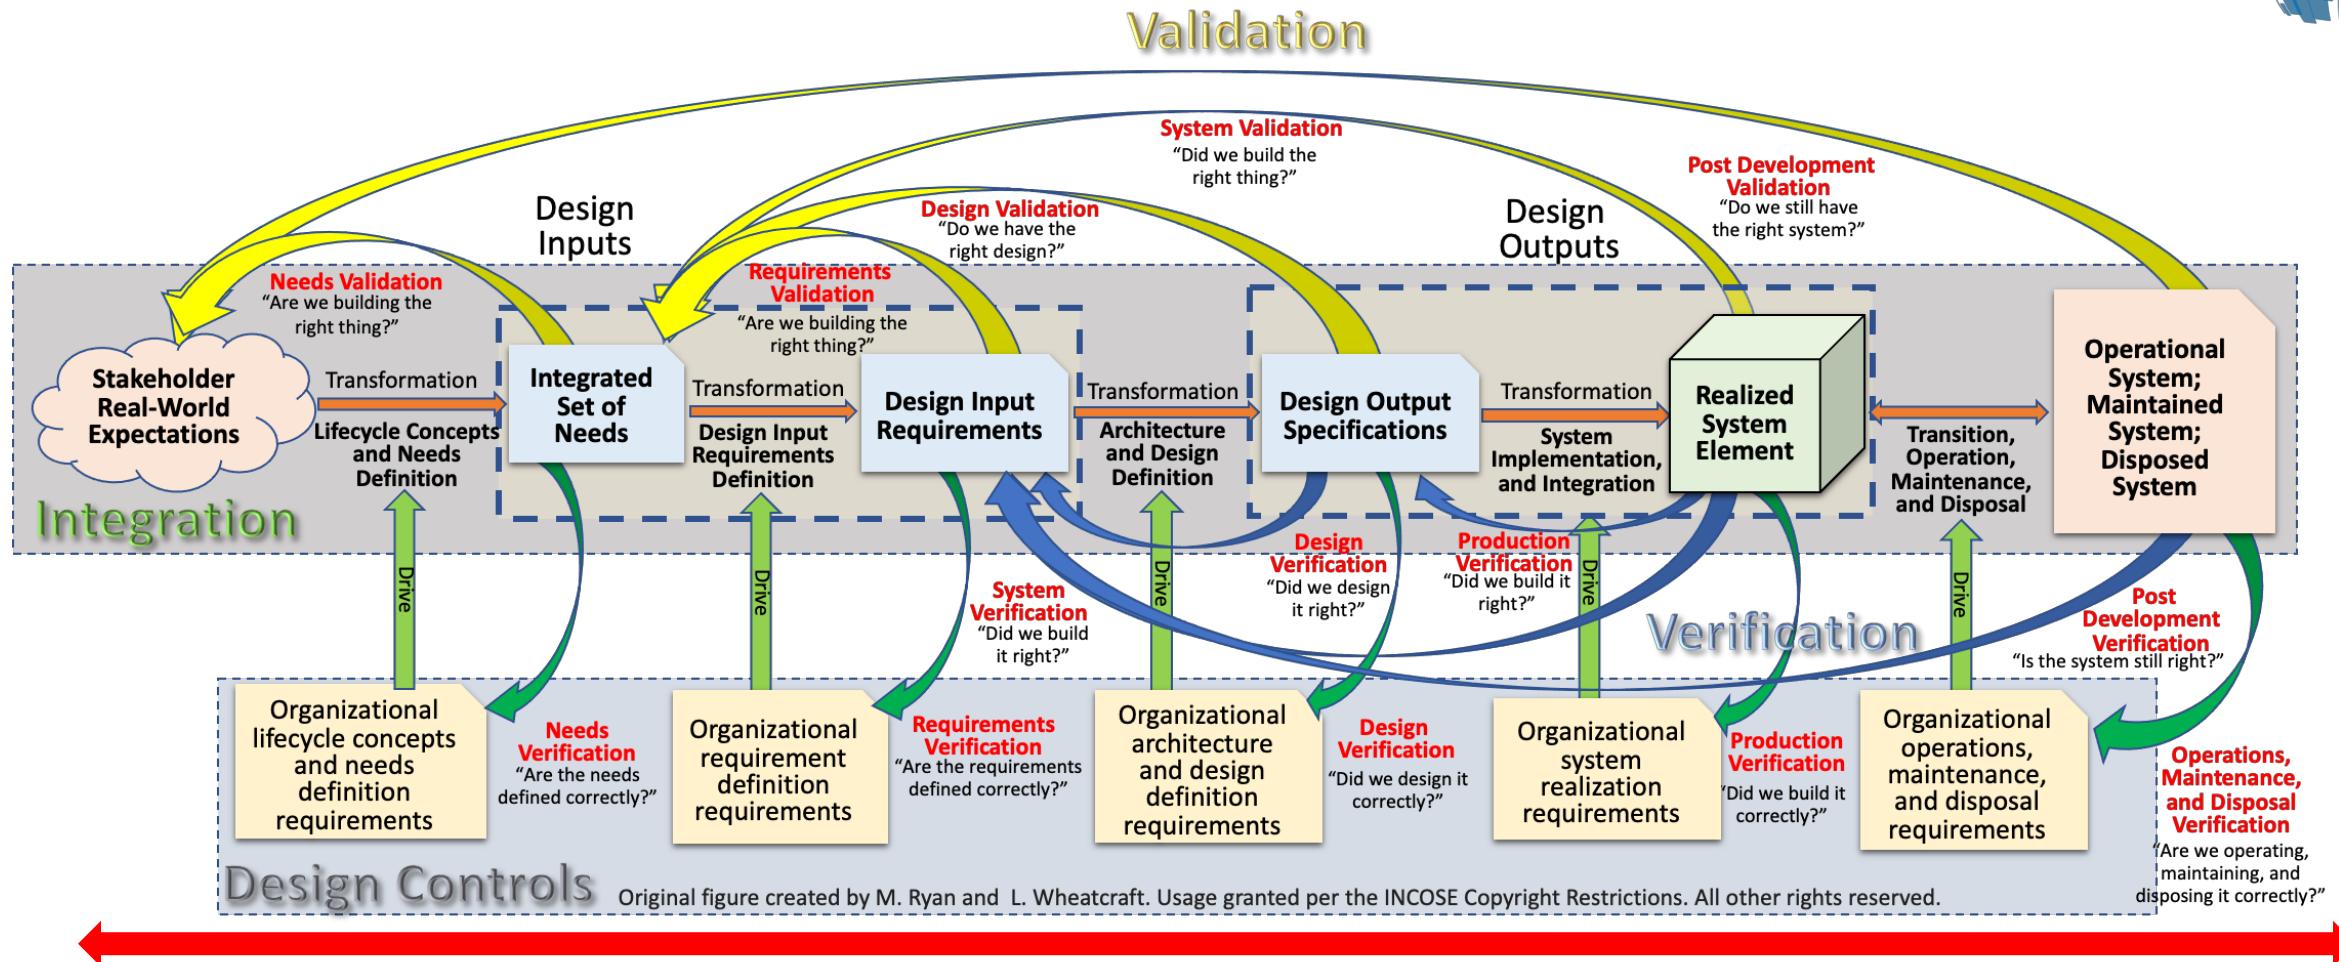


Needs, Requirements, Verification, and Validation are the common threads that tie all lifecycle activities and artifacts together.



Vertical Traceability

- **Vertical traceability** is most often referred to in the context of levels of organization and architectural levels of the system or product under development.
 - Each level has lifecycle CNR defined for each entity at that level.
 - Organizational-level business requirements drive the development of the operational-level lifecycle CNR.
 - As the operational lifecycle CNR are defined, bidirectional traceability is established with the higher-level business requirements.
 - This repeats for each level.

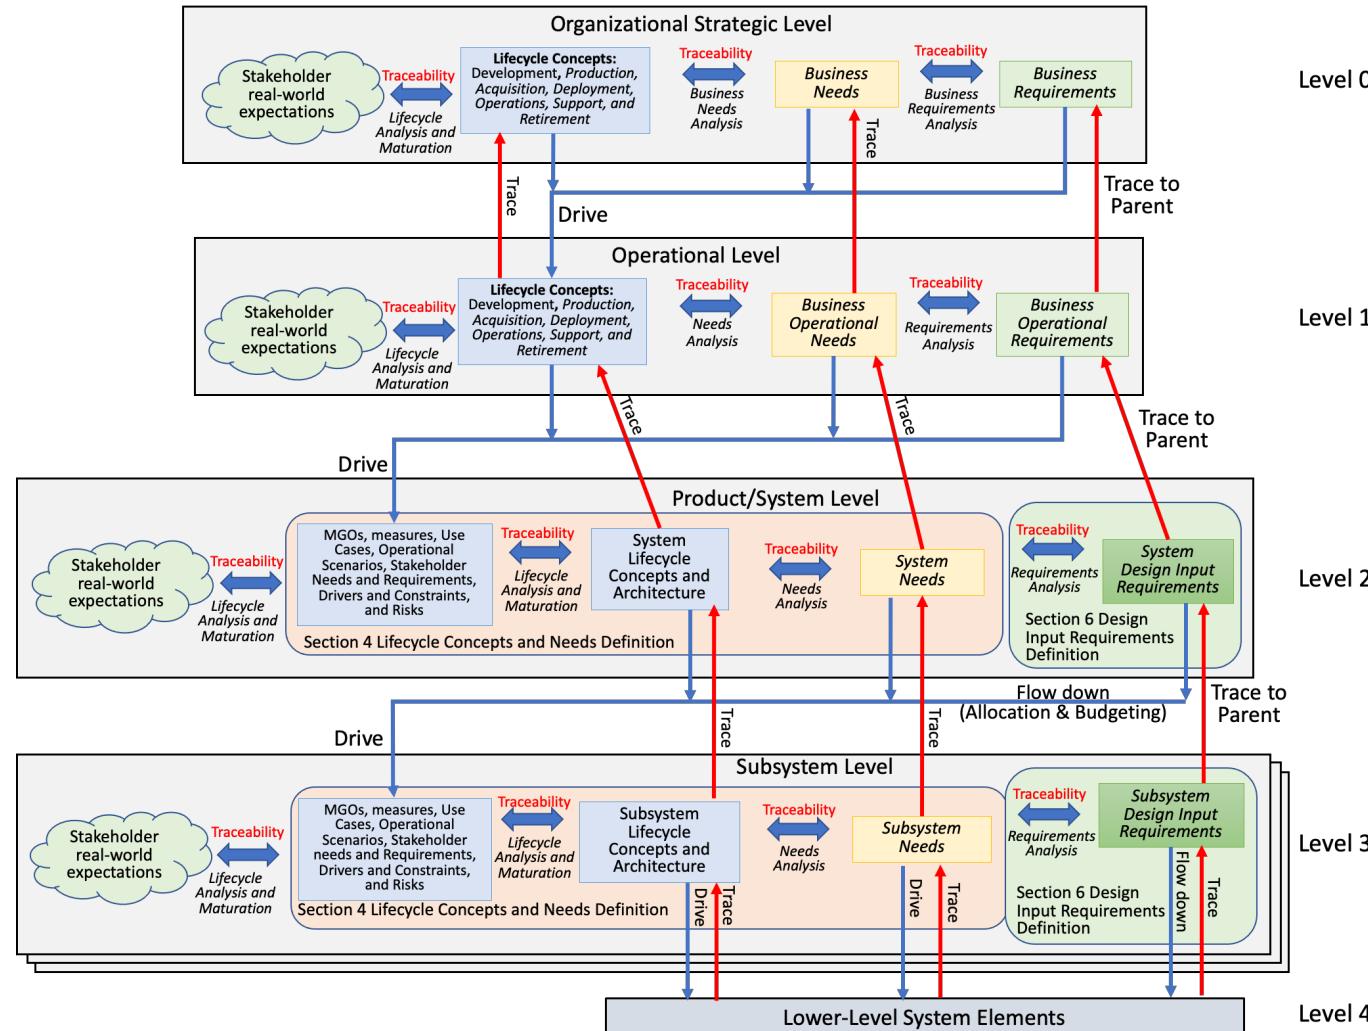

Original figure created by M. Ryan and L. Wheatcraft. Usage granted per the INCOSE Copyright Restrictions. All other rights reserved.


Vertical Traceability Between Artifacts at Different Levels of Architecture



Each part of the system architecture is represented by a family of systems engineering artifacts.

Artifacts at one level drive the definition of the artifacts at the next lower level.

The artifacts at a lower level, must trace to the artifacts generated at the next higher level.

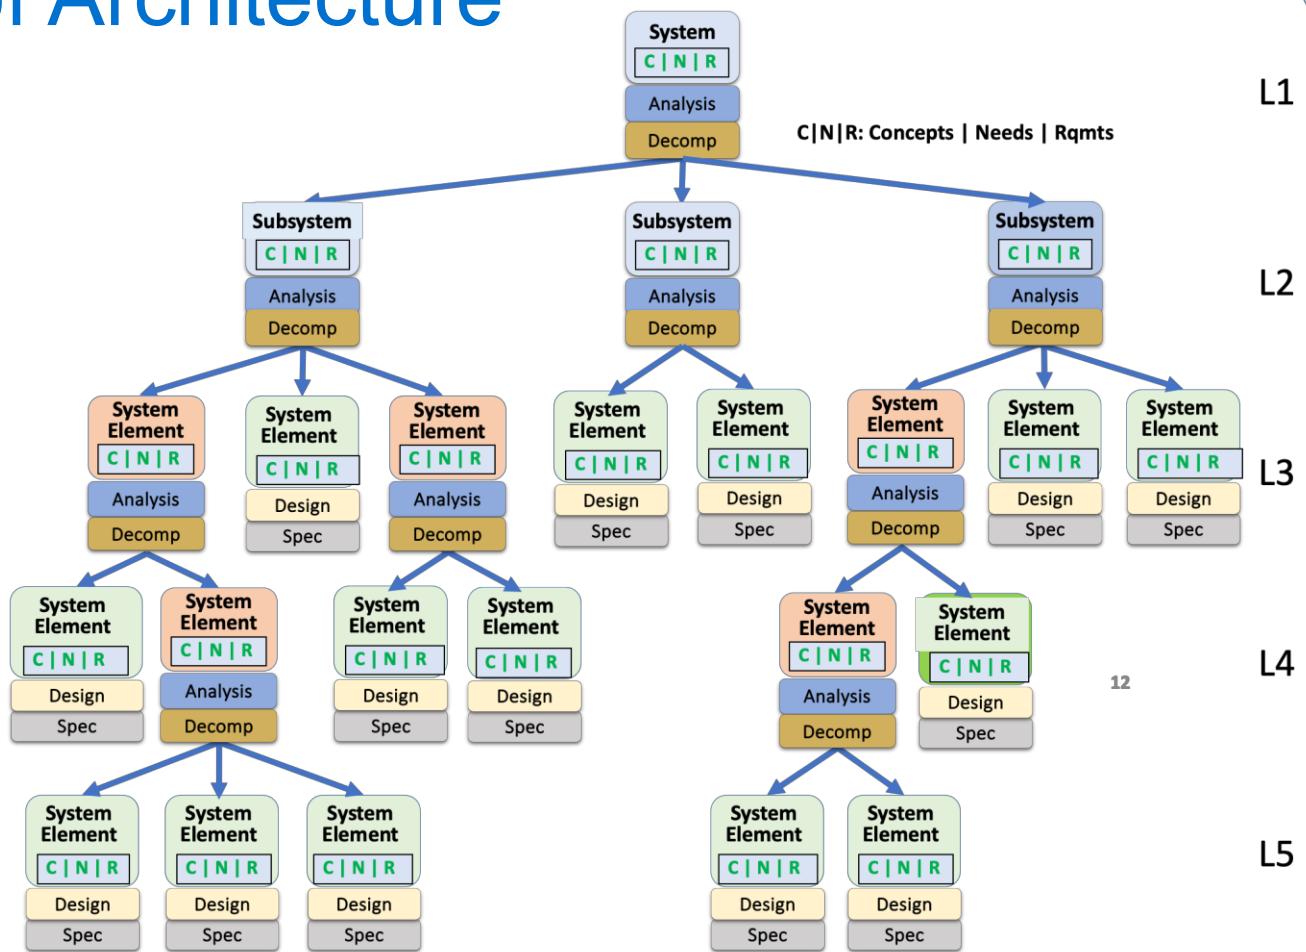

Original figure created by M. Ryan and L. Wheatcraft. Usage granted per the INCOSE Copyright Restrictions. All other rights reserved.

A major issue with this view of the architecture is it doesn't show the interactions and relationships between parts of the architecture.



Types of Relationships




Relationships Between Entities



The behavior of a system is a function of the interactions of its parts and interactions of the system with its operational environment.

Systems Engineering can be viewed as a system made up of various artifacts and the relationships between artifacts.


Traceability enables the identification and management of the relationships between the various artifacts.

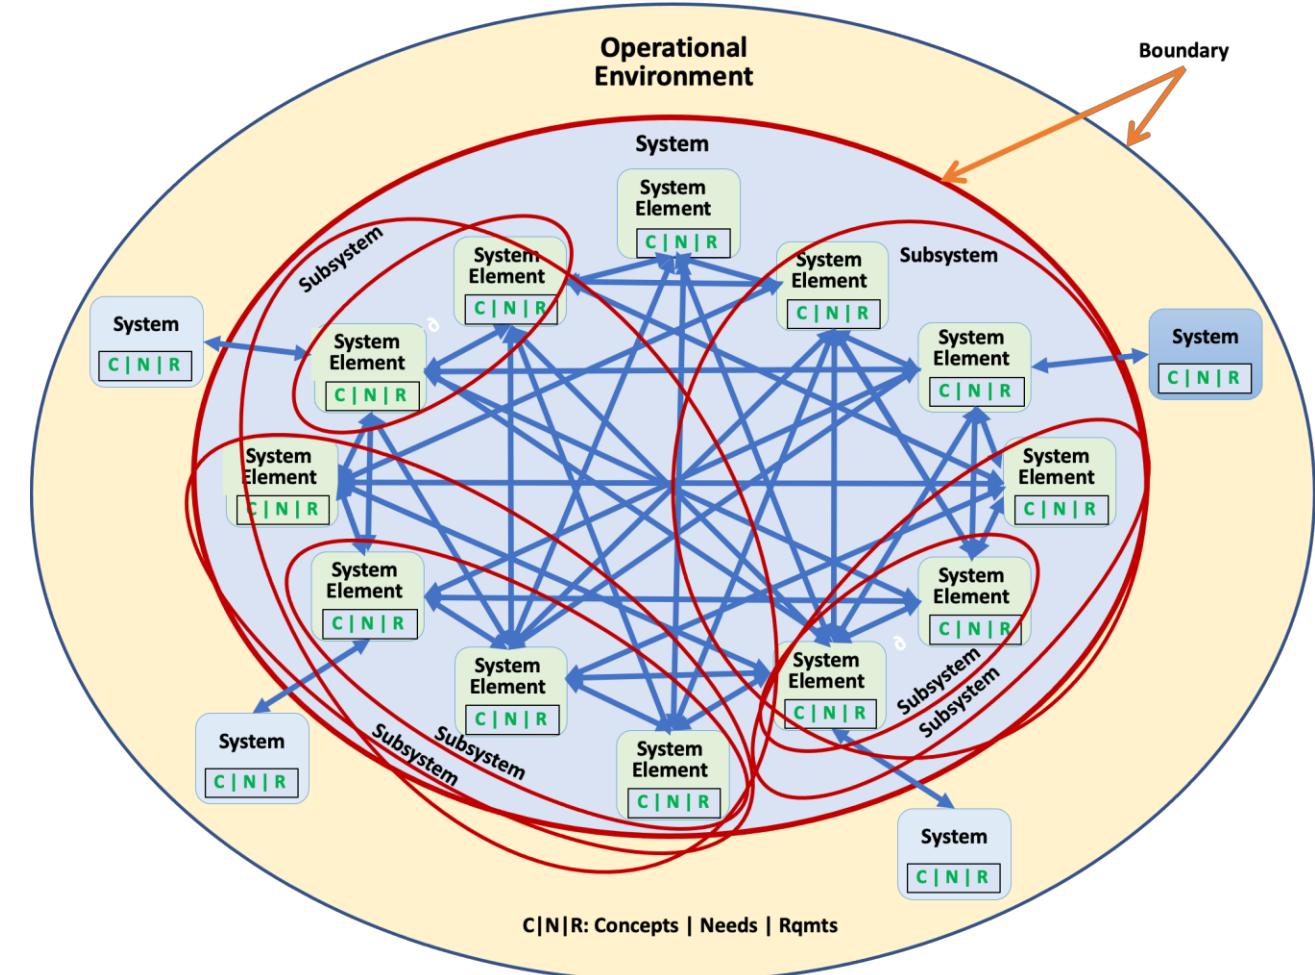

Original figure created by L. Wheatcraft. Usage granted per the INCOSE Copyright Restrictions. All other rights reserved.



Horizontal and Vertical Relationships

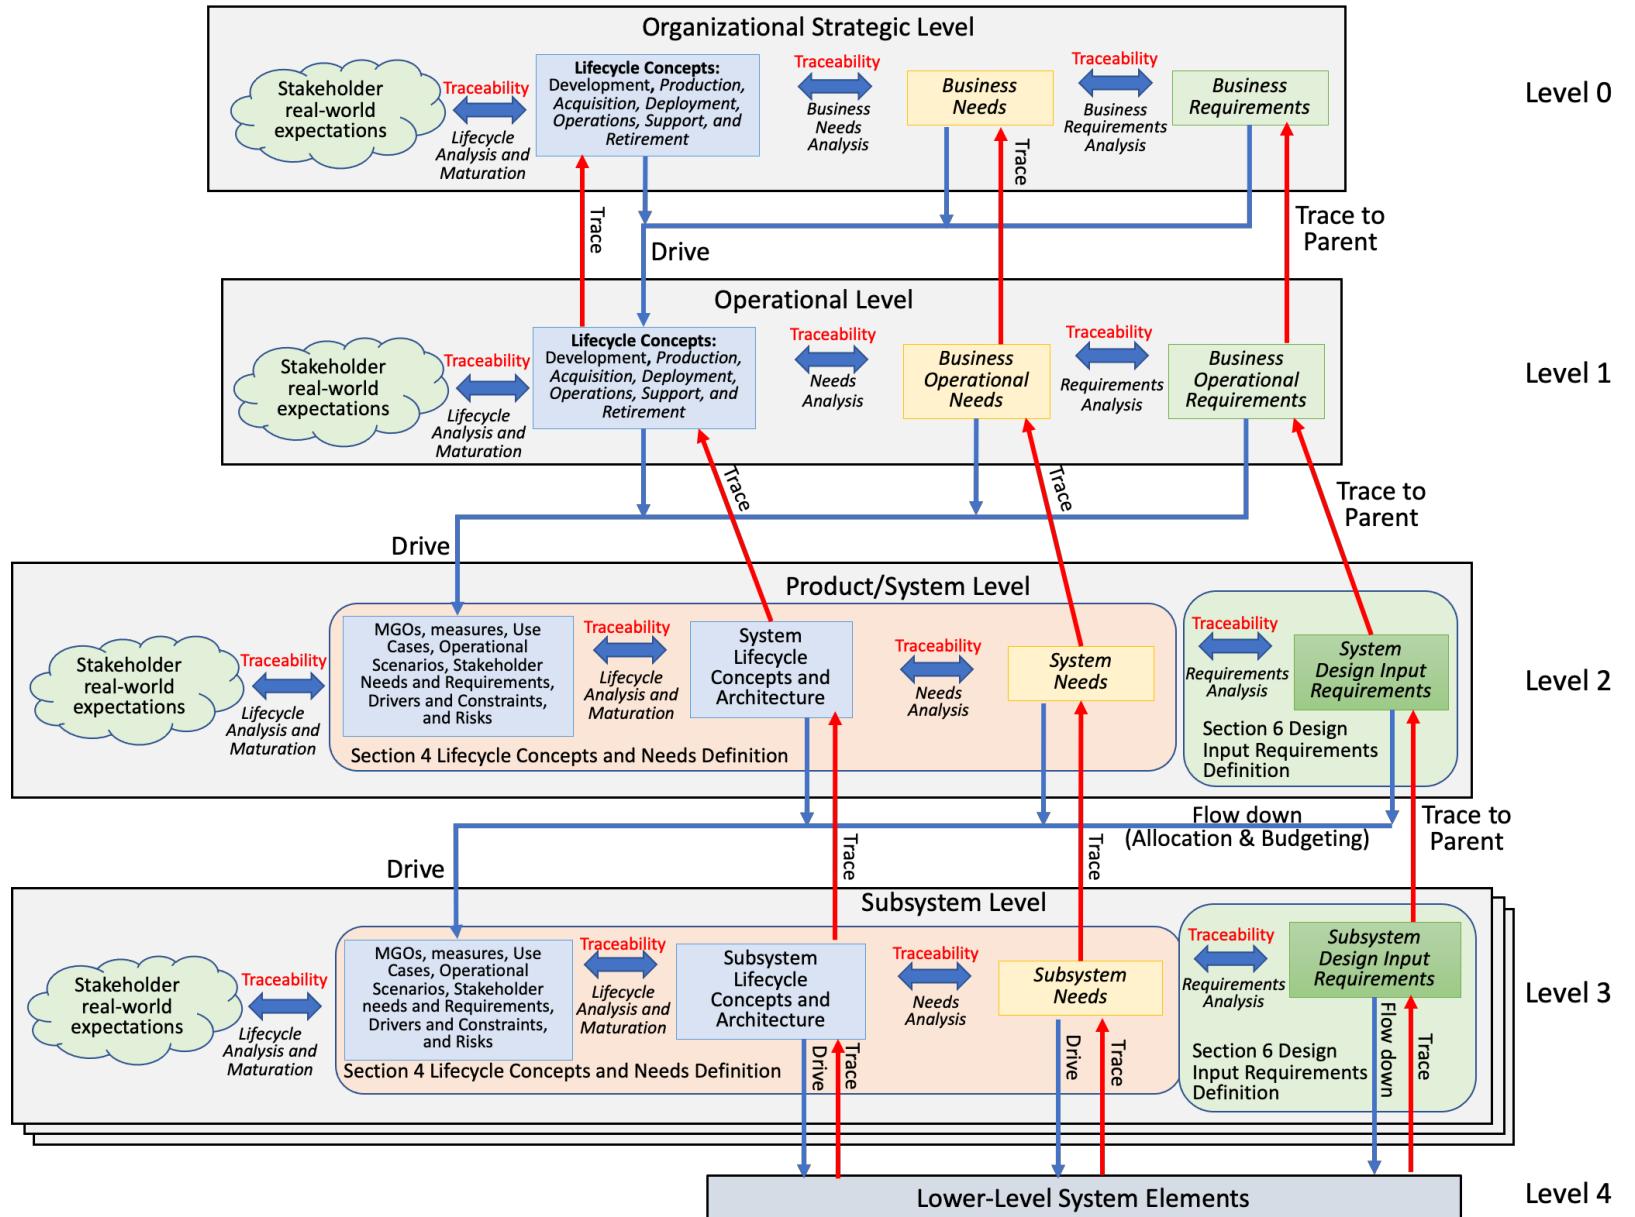


Original figure created by M. Ryan and L. Wheatcraft. Usage granted per the INCOSE Copyright Restrictions. All other rights reserved.



Types of Relationships


- **Design input requirement to implementing design artifacts** - shows a relationship between a design input requirement and its design implementation and resulting design output specifications.
- **Requirement to system verification artifacts** - displays relationship of requirements to verification artifacts or activities that will provide evidence of requirement satisfaction.
- **Need to system validation artifacts** - displays relationship of needs to validation artifacts or activities that will provide evidence of need satisfaction.

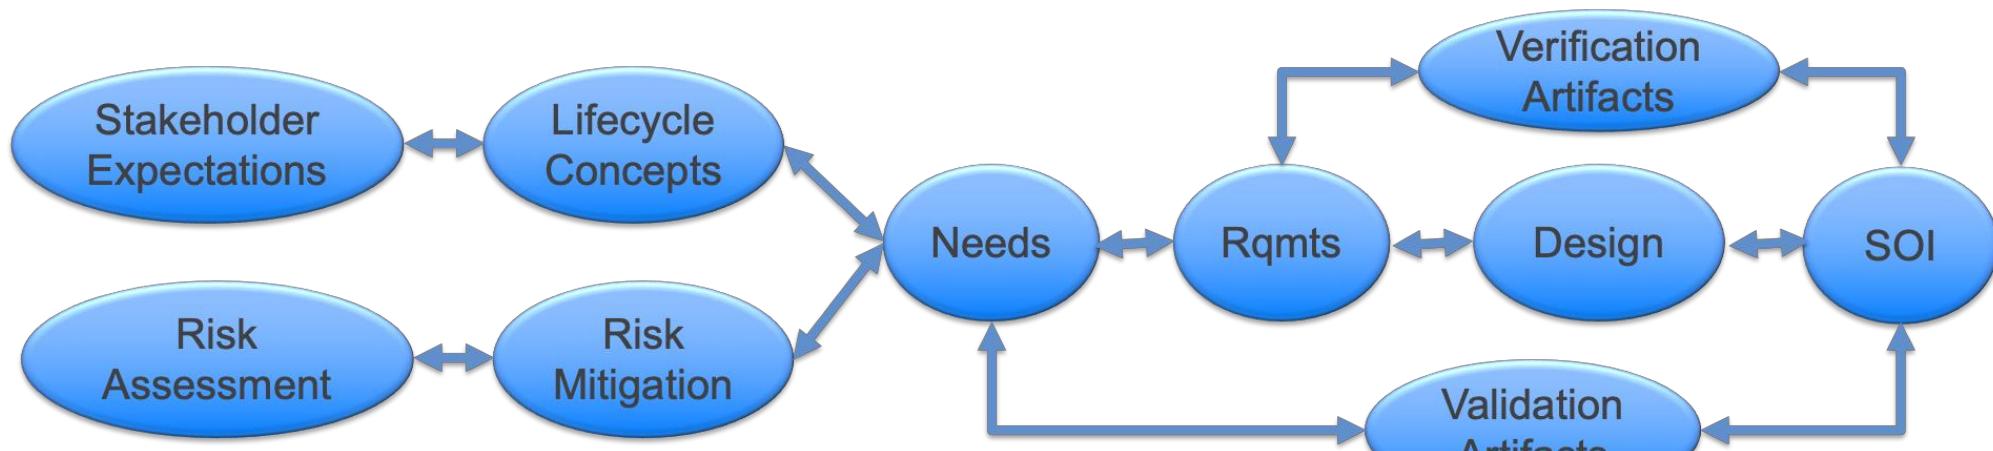



Types of Relationships

- **Flow down of a requirement to a lower-level entity (allocation)** – allows a link from a higher-level requirement to a lower-level subsystem or system element the parent requirement is allocated or budgeted to.
 - Note: this is not a requirement-to-requirement link, but a requirement to a lower-level subsystem or system element within the SOI architecture, for which child requirements will be defined and then traced back to the allocated parent requirement.
 - The trace is child requirement to parent requirement

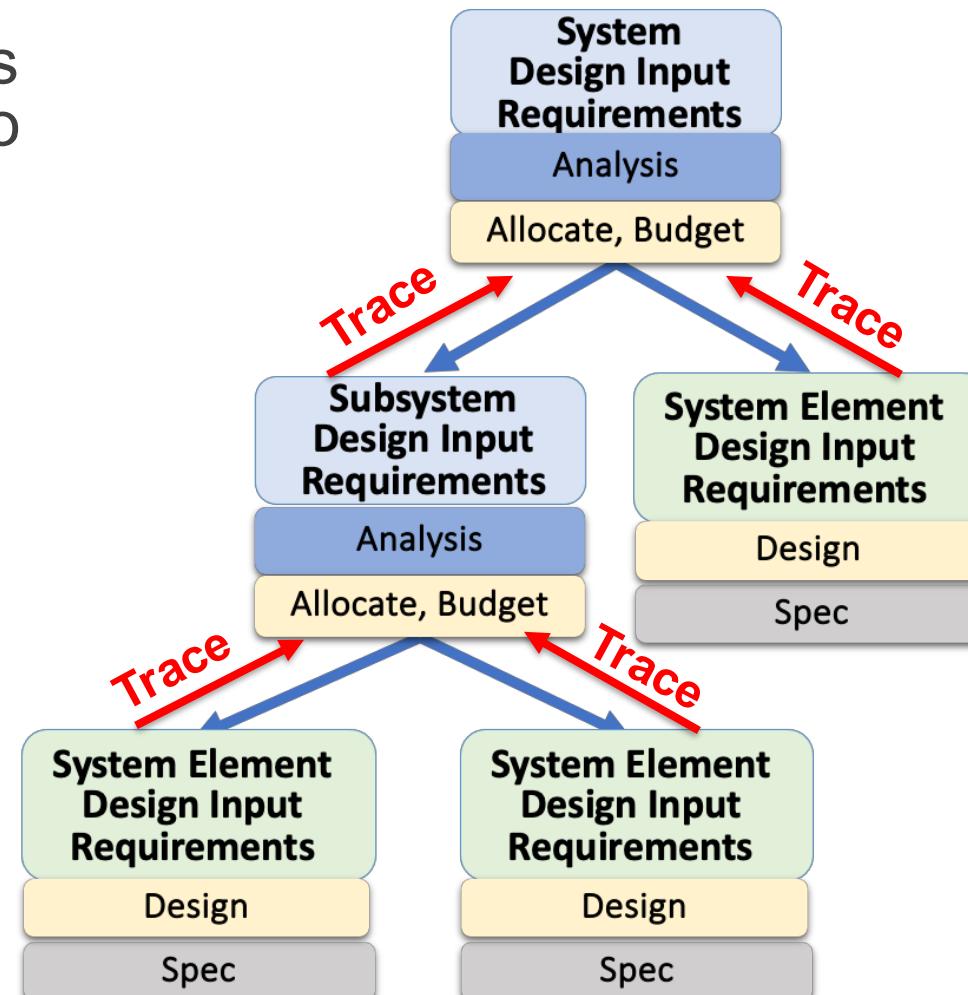


Original figure created by L. Wheatcraft.

Usage granted per the INCOSE Copyright Restrictions. All other rights reserved.



Types of Relationships

Parent/child – shows a connection of child requirement(s) to a higher-level allocated parent requirement that, when realized, will result in the intent of the parent to be met.

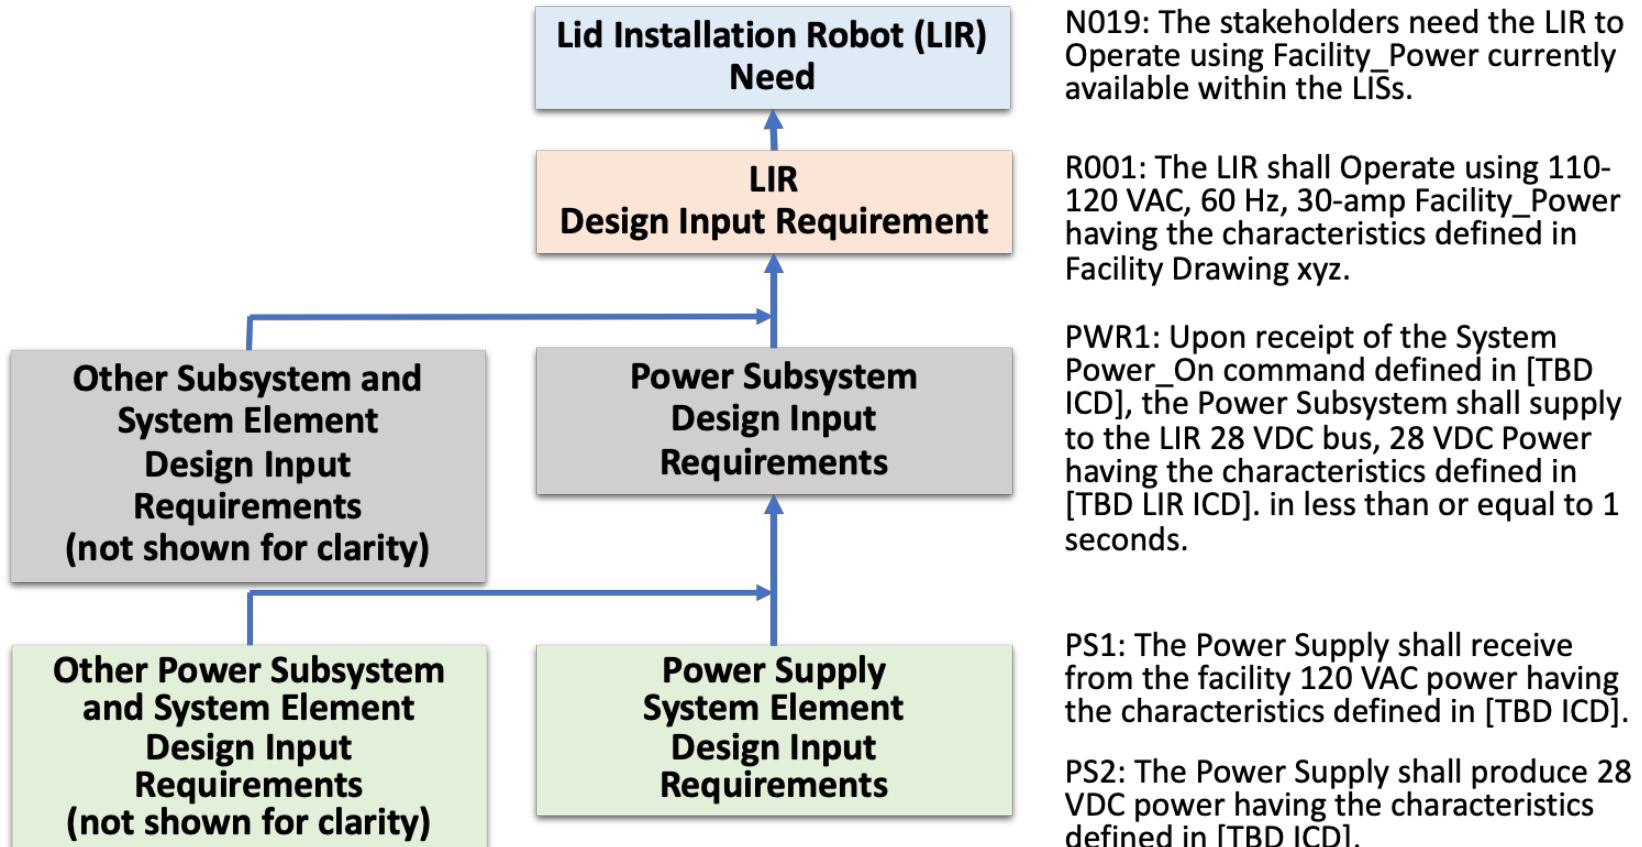

N019: The stakeholders need the LIR to Operate using Facility_Power currently available within the LISs.

R001: The LIR shall Operate using 110-120 VAC, 60 Hz, 30-amp Facility_Power having the characteristics defined in Facility Drawing xyz.

PWR1: Upon receipt of the System Power_On command defined in [TBD ICD], the Power Subsystem shall supply to the LIR 28 VDC bus, 28 VDC Power having the characteristics defined in [TBD LIR ICD]. in less than or equal to 1 seconds.

PS1: The Power Supply shall receive from the facility 120 VAC power having the characteristics defined in [TBD ICD].

PS2: The Power Supply shall produce 28 VDC power having the characteristics defined in [TBD ICD].



Original figure created by T. Katz and L. Wheatcraft. Usage granted per the INCOSE Copyright Restrictions.
All other rights reserved.

Use of Trace Matrices to View Relationships



System Need	System Requirement	Subsystem Requirement	System Element Requirement
N017: The stakeholders need the LIR to Operate using Facility-Power currently available within the LISs.	R026: The LIR shall Operate using 110-120 VAC, 60 Hz, 30-amp Facility_Power having the characteristics defined in Facility Drawing xyz.	PWR1: Upon receipt of the System Power_On command defined in [TBD ICD], the Power Subsystem shall supply to the LIR 28 VDC bus, 28 VDC power having the characteristics defined in [TBD LIR ICD] in less than or equal to 1 seconds.	PS1: The Power Supply shall receive facility120 VAC power having the characteristics defined in [TBD ICD]. PS2: The Power Supply shall produce 28 VDC power having the characteristics defined in [TBD] ICD.
		[Additional subsystem requirements would be shown below]	

Use of Trace Matrices to View Relationships Within a SyML model

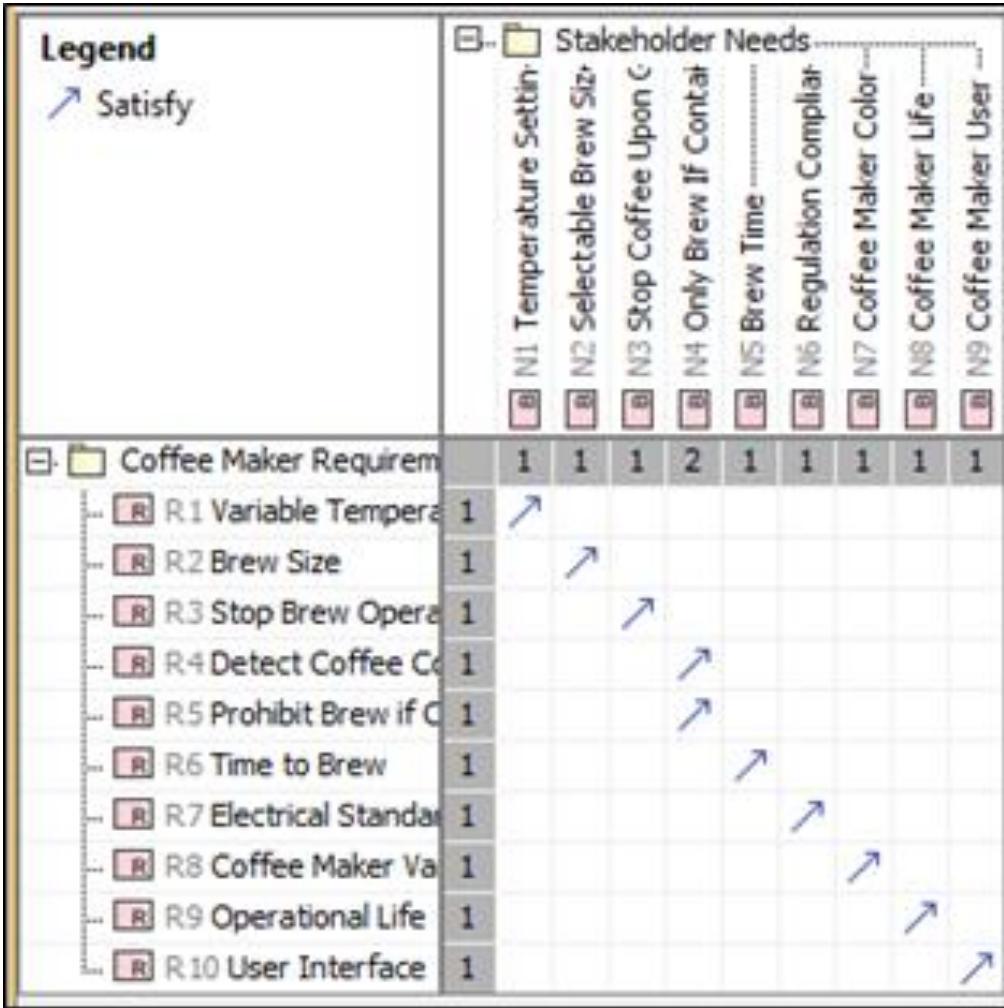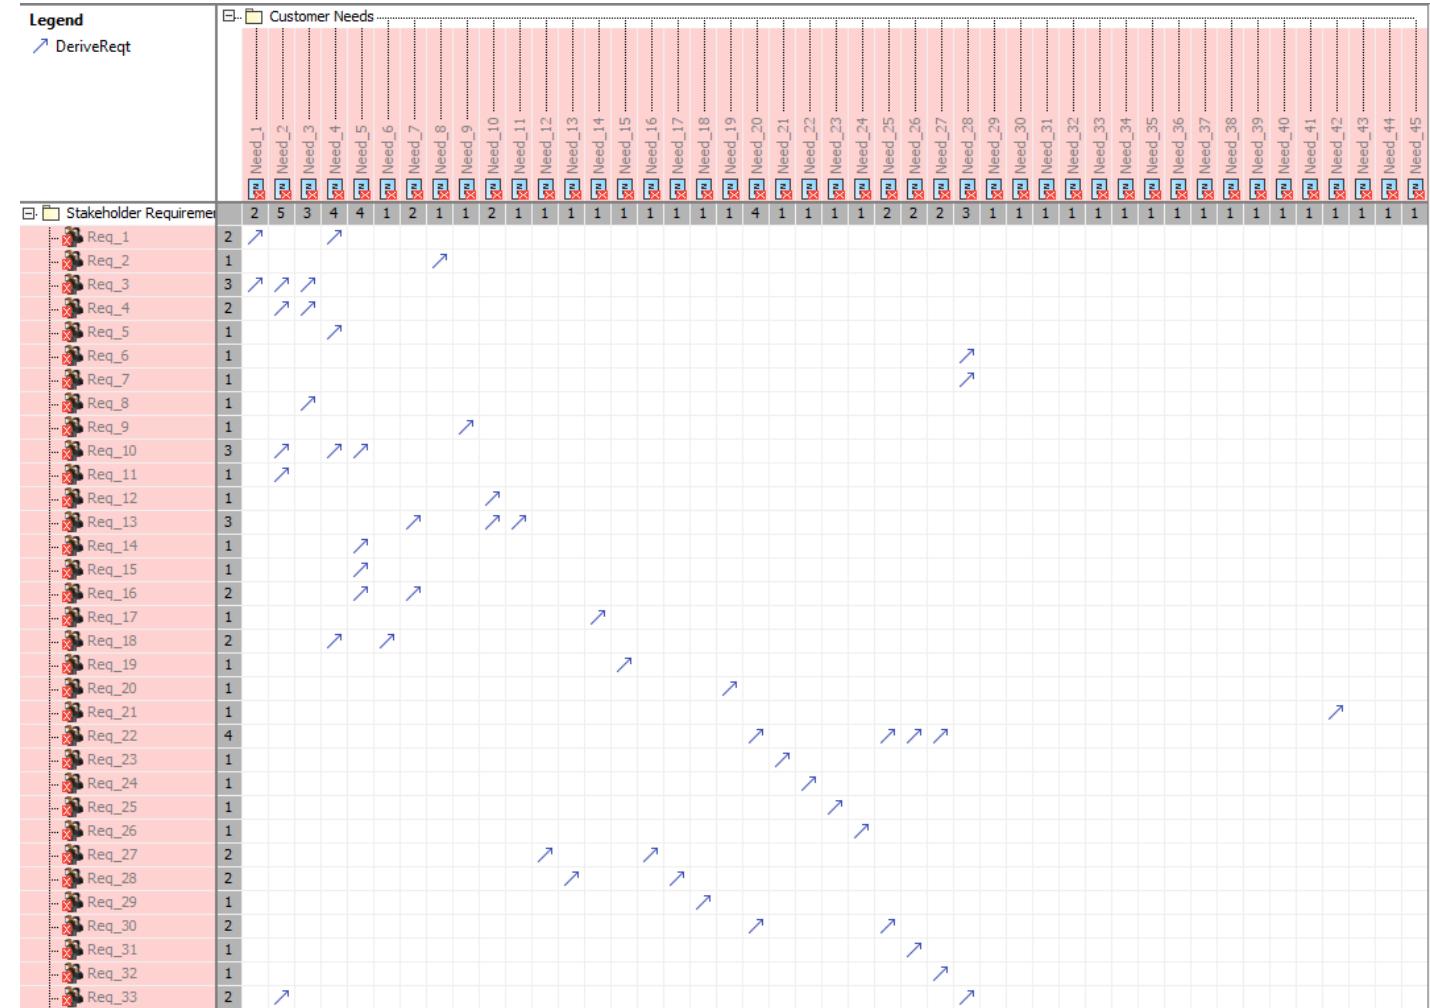

Types of Relationships




Requirement to a source -
shows connection to where requirement content was derived (such as a constraint, standard, regulation, MGOs, measures, concept, risk, a model, analysis, or need)

In the past, the focus was on traceability of a child to a parent allocated requirement as discussed in the previous slide.

In reality, the parent is just one source of a requirement.

In addition, we must also think of the source of the needs contained within the integrated set of needs.

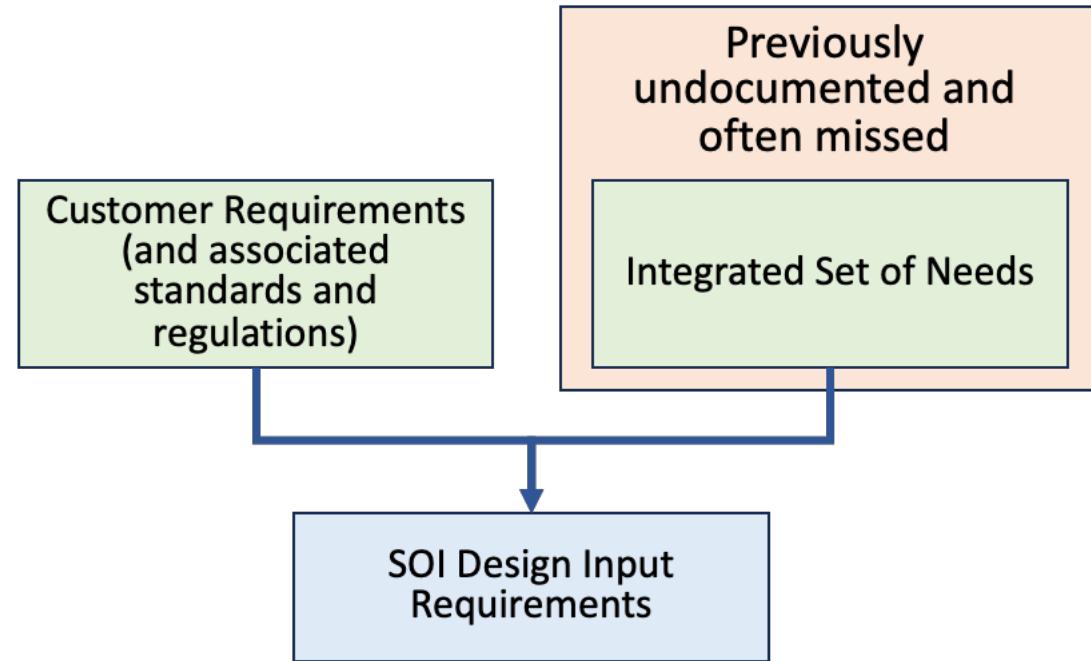


Original figure created by T. Katz and L. Wheatcraft. Usage granted per the INCOSE Copyright Restrictions.
All other rights reserved.



Types of Relationships

Interface requirement to an interface definition - provides traceability between an interface requirement and the agreed to definition concerning the interaction across an interface boundary between the SOI and another entity.

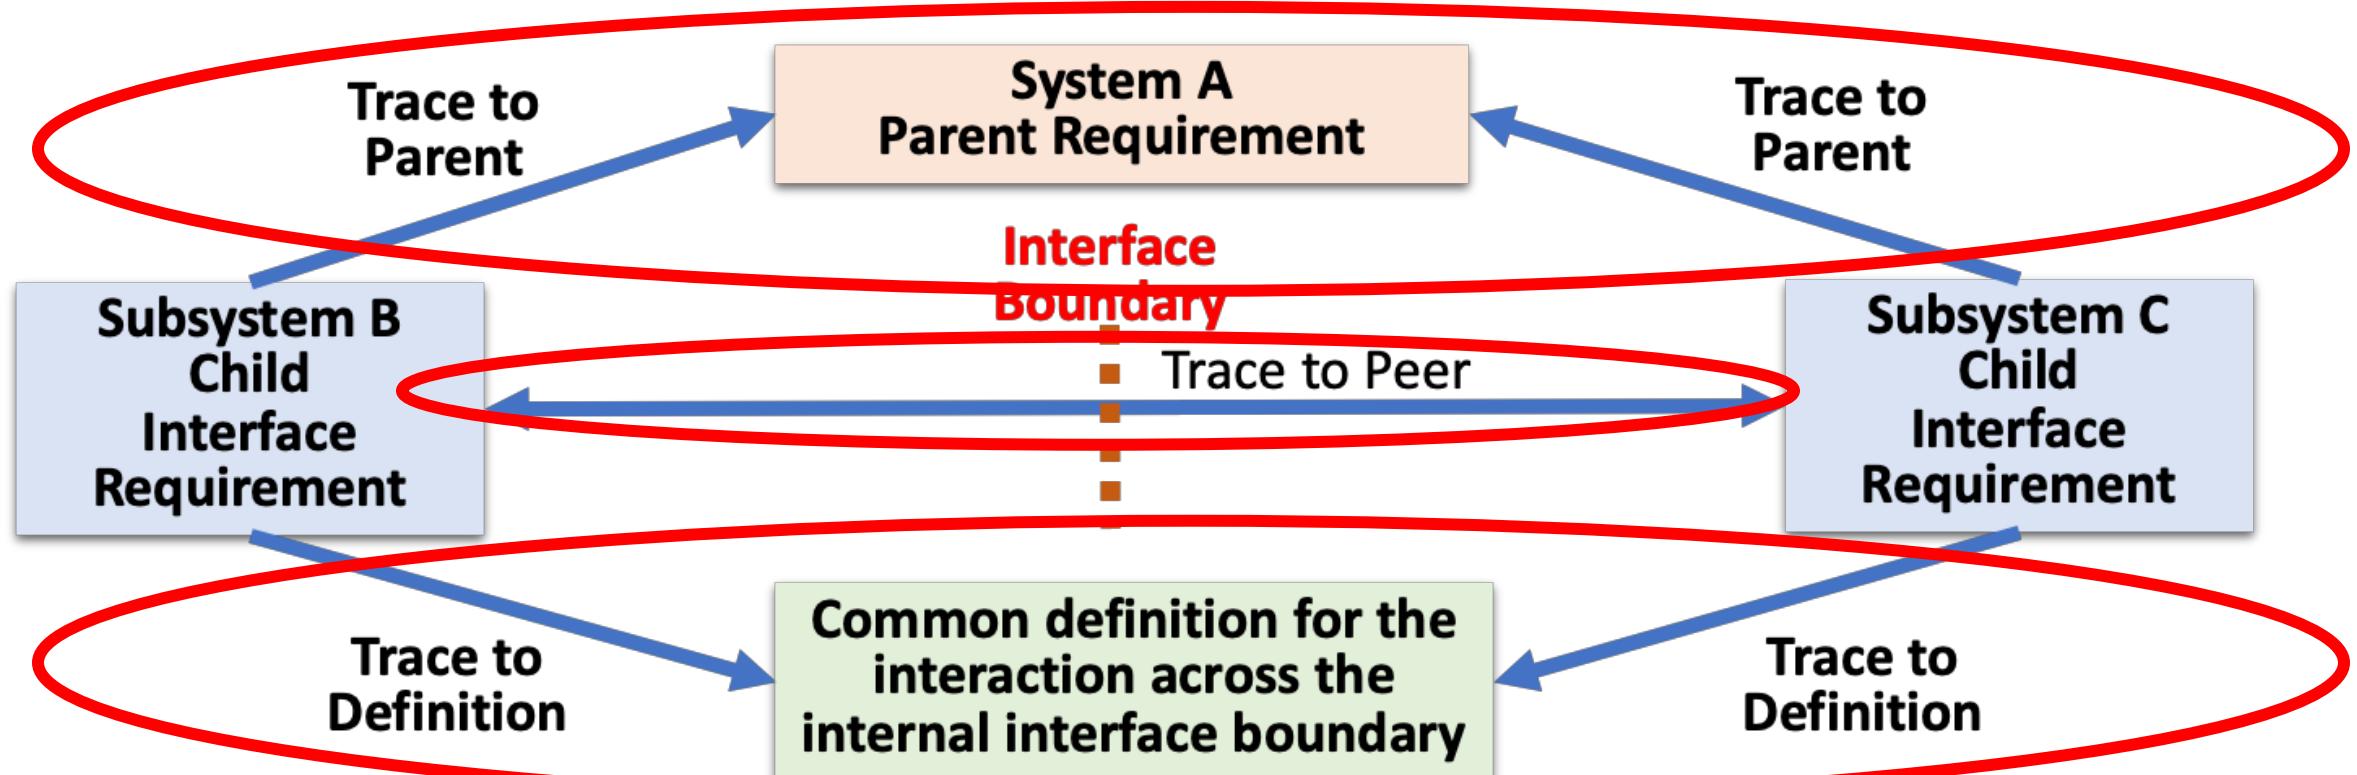

Original figure created by L. Wheatcraft. Usage granted per the INCOSE Copyright Restrictions. All other rights reserved.



Types of Relationships

- **Peer to peer**- establishes relationships among requirements at the same level, either within the same set or requirements contained in different subsystem or system element sets of requirements.
 - The relationship could be general or grouped by topic (such as connecting requirements of a particular theme, connecting interface requirements, requirements sharing a common budgeted quantity, and connecting performance requirements that relate to a common function).
- **Dependency of a requirement on another** - shows a relationship of one requirement to one or more requirements in which there is a dependency
 - For example items that must be completed together to be satisfied (can be other requirements, or representation of specific conditions) or a relationship to another requirement such that a change in one will result in the need to change the other.
 - The other requirement could be in a separate set of requirements for a different system, subsystem, or system element.


Allocation and Budgeting



As part of allocation, performance, form, and quality requirements are apportioned (budgeted) to each system, subsystem, and system element that has a role in the realization of the budgeted value.

Budgets need to be managed and controlled at the integrated system level.

A critical concept associated with requirements and budgeting is that the budgeted quantities result in requirements that have a dependency - a change in one will result in the need to change another.

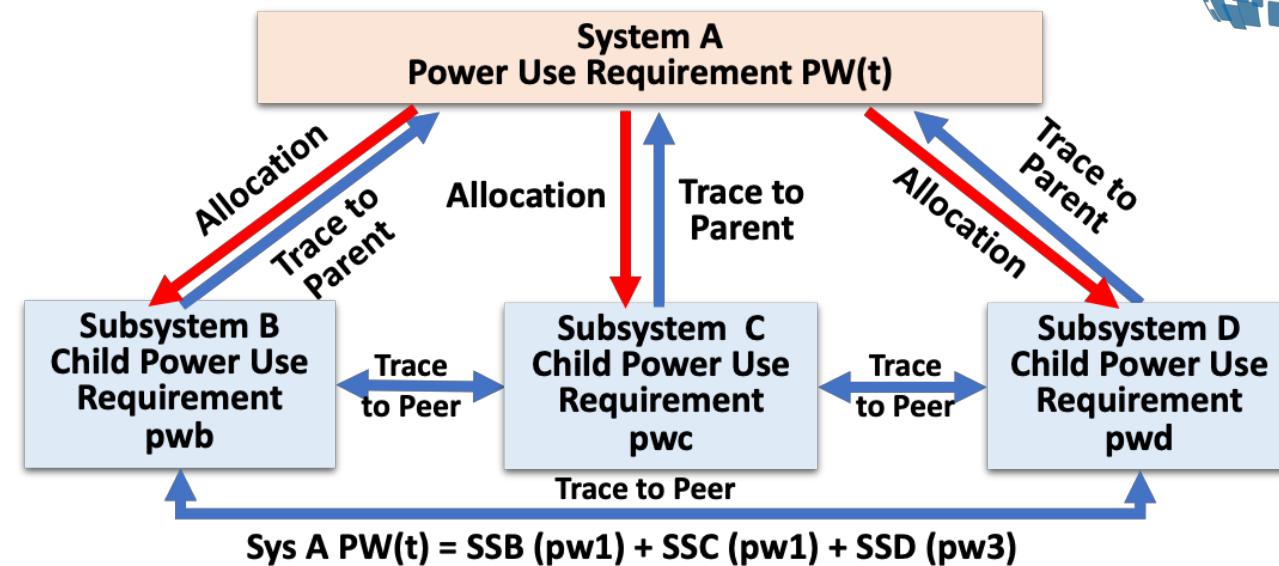

SS = Subsystem, SE = System element $PW(t)$ = Maximum power use Pwx = Allocated value

Original figure created by L. Wheatcraft. Usage granted per the INCOSE Copyright Restrictions.
All other rights reserved.

Budgets must be carefully controlled as they tend to change as the design matures.


Both trace to parent and trace to peer are critical to manage and control budgeted values.

Allocation and Budgeting



PW(t) = Maximum power use
P_{wx} = Allocated value

SS = Subsystem,
SE = System element

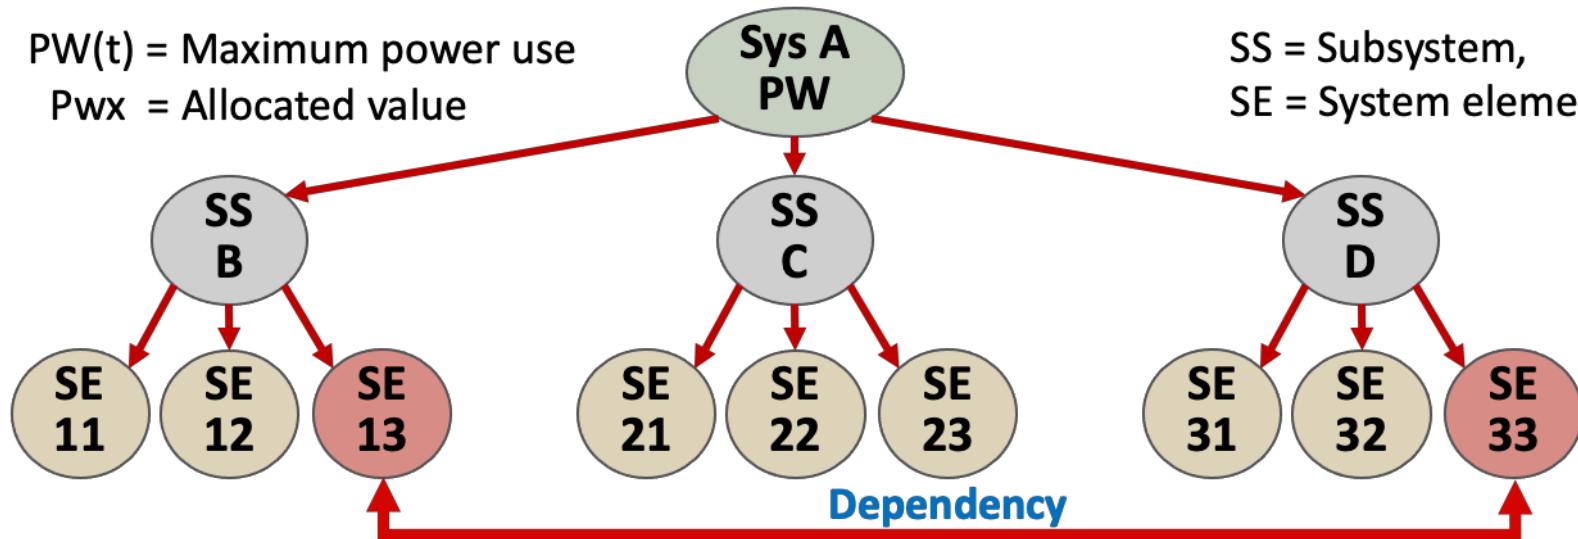

$$\text{Sys PW(t)} = \text{SSB(pwb)} + \text{SSC (pwc)} + \text{SSD (pwd)}$$

↳ = SE31(pw31) + SE32 (pw32) + **SE33(pw33)** ↳

$$\text{L} = \text{SE21}(\text{pw21}) + \text{SE22}(\text{pw22}) + \text{SE23}(\text{pw23})$$

$$\text{L} = \text{SE11}(\text{pw11}) + \text{SE12}(\text{pw12}) + \text{SE13}(\text{pw13})$$

Dependency


Dependencies at lower levels may not be obvious, but it is critical to identify and manage them.

The use of models should help identify dependencies across multiple levels of an integrated system model.



Types of Relationships

- ***Textual requirement in an RMT to the equivalent requirement within a model*** - a trace between a requirement and an entity within a model. For example, a functional requirement would be linked to a function within a functional model; a performance characteristic of a function would be linked to that function within the model.

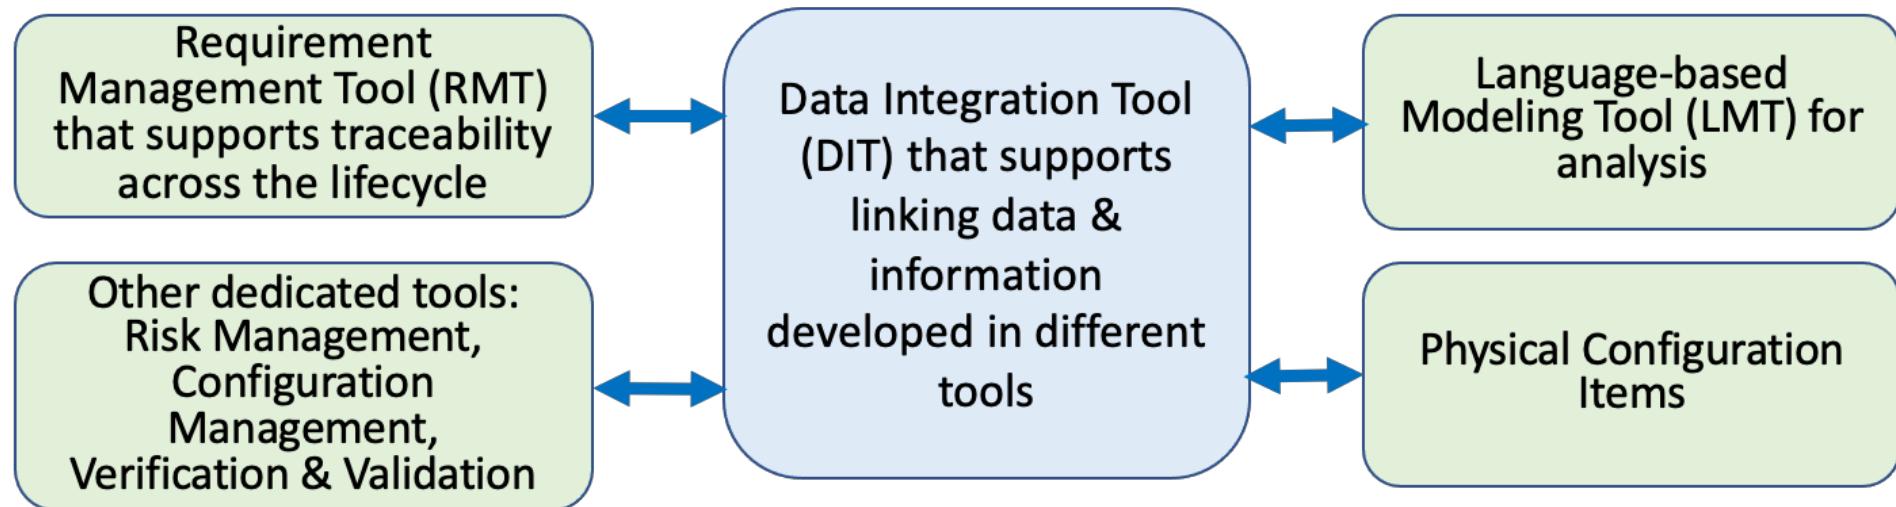

Original figure created by L. Wheatcraft. Usage granted per the INCOSE Copyright Restrictions. All other rights reserved.

Must establish the ability to share and link data between tools to ensure consistency and establish an ASoT.



Relationships within Models



Relationships within Models



- Many of the benefits of using traceability relationships are additionally enhanced when requirements are developed using modeling techniques, such as with SysML or other language-based modeling tools.
- When using requirement content in SysML tools, there are additional ways requirements can show relationships to other requirements or other elements within the model using requirements diagrams.
 - For example, in SysML applications, requirement diagrams are used to display textual requirements, the relationships between requirements, and the relationships between requirements and other model elements.
- Most requirement relationships in SysML are based on the UML dependency.
 - The arrow points from the dependent model element (client) to the independent model element (supplier).
 - Hence in SysML, the arrow's direction is opposite to that typically used for requirements flows, where the higher-level requirement points to the lower-level requirement.

Types of relationships and dependencies within SysML



- **Containment** - showing how a model element is contained within a larger package, such as showing how requirements are contained within a specific theme package. For requirements, this could be used to indicate a requirement is contained within a given set for an entity within the system architecture.
- **Trace** - showing that requirements have a dependency, changes to a connected requirement could result in the need to change a dependent requirement.
- **Derive requirement** - type of dependency showing a requirement was derived from the connected requirement. Derived requirements can correspond to child requirements at the next level of the architecture indicating a parent/child relationship.
- **Refine** - type of dependency, connecting a requirement to a model element that provides more details, such as a use case, misuse case, loss scenario, user story, or operational concept.
- **Satisfy** - type of dependency, connecting a requirement to a model element that provides fulfillment of the requirement within the design, such as a design output specification.
- **Verify** - type of dependency, connecting a requirement to a model element that provides objective evidence of requirement satisfaction, such as a test case, verification *Activity*, verification *Procedure*, or other verification artifacts such as verification *Method*, *Success Criteria*, or *Strategy*.



Combine Allocation & Traceability to Manage Requirements

Combine Allocation & Traceability to Manage Requirements



- Combining the concepts of allocation and traceability provides a powerful method to manage the design input requirements, especially across levels and across subsystems and system elements within a specific level.
- Unfortunately, the concept of allocation is not as well understood as traceability. There are several common misconceptions and bad practices concerning allocation and traceability:
 - *Some feel they can use the traceability matrices to assess allocation.*
 - The thought process is that if a parent has child requirements defined for a subsystem or system element, it is a safe assumption that the parent must have been allocated to that subsystem or system element – *this is often a bad assumption!*
 - *Missing information in the traceability matrix.*
 - Another issue is that when the traceability matrices are developed, rather than including the requirement text (or at least a summary or title of the requirement) in the matrix, only requirement numbers are used – *thus the validity and correctness of the allocation and traces is hard to assess.*
 - *Not all tool vendors understand the real meaning of allocation and thus do not always implement the concept correctly within their tools.*
 - One way to test this is to ask the tool vendors if they can generate a report that lists all child requirements that trace to a parent requirement that was NOT allocated to the subsystem or system element in which the child requirements exist.

Combine Allocation & Traceability to Manage Requirements




- Common defects that can be identified by combining the concepts of allocation and traceability include:
 - Parent requirements with no child requirements.
 - Needs with no implementing design input requirements.
 - Orphan needs that do not trace to a source.
 - Orphan requirements that do not trace to a need, parent, or a source.
 - Needs, sources, or requirements with incorrect or missing implementing children.
 - Child requirements with an incorrect parent or source.
 - Sets of child requirements are not necessary and sufficient to implement the parent requirement, need, or source from which it was transformed/derived.
- Addressing the issues discussed above is hard and can take a considerable amount of time and resources.
- Using a data-centric approach as advocated in the NRM can reduce the occurrence of these issues as well as make it much easier to identify and correct these issues.



Managing Change




Manage Change Across the Lifecycle

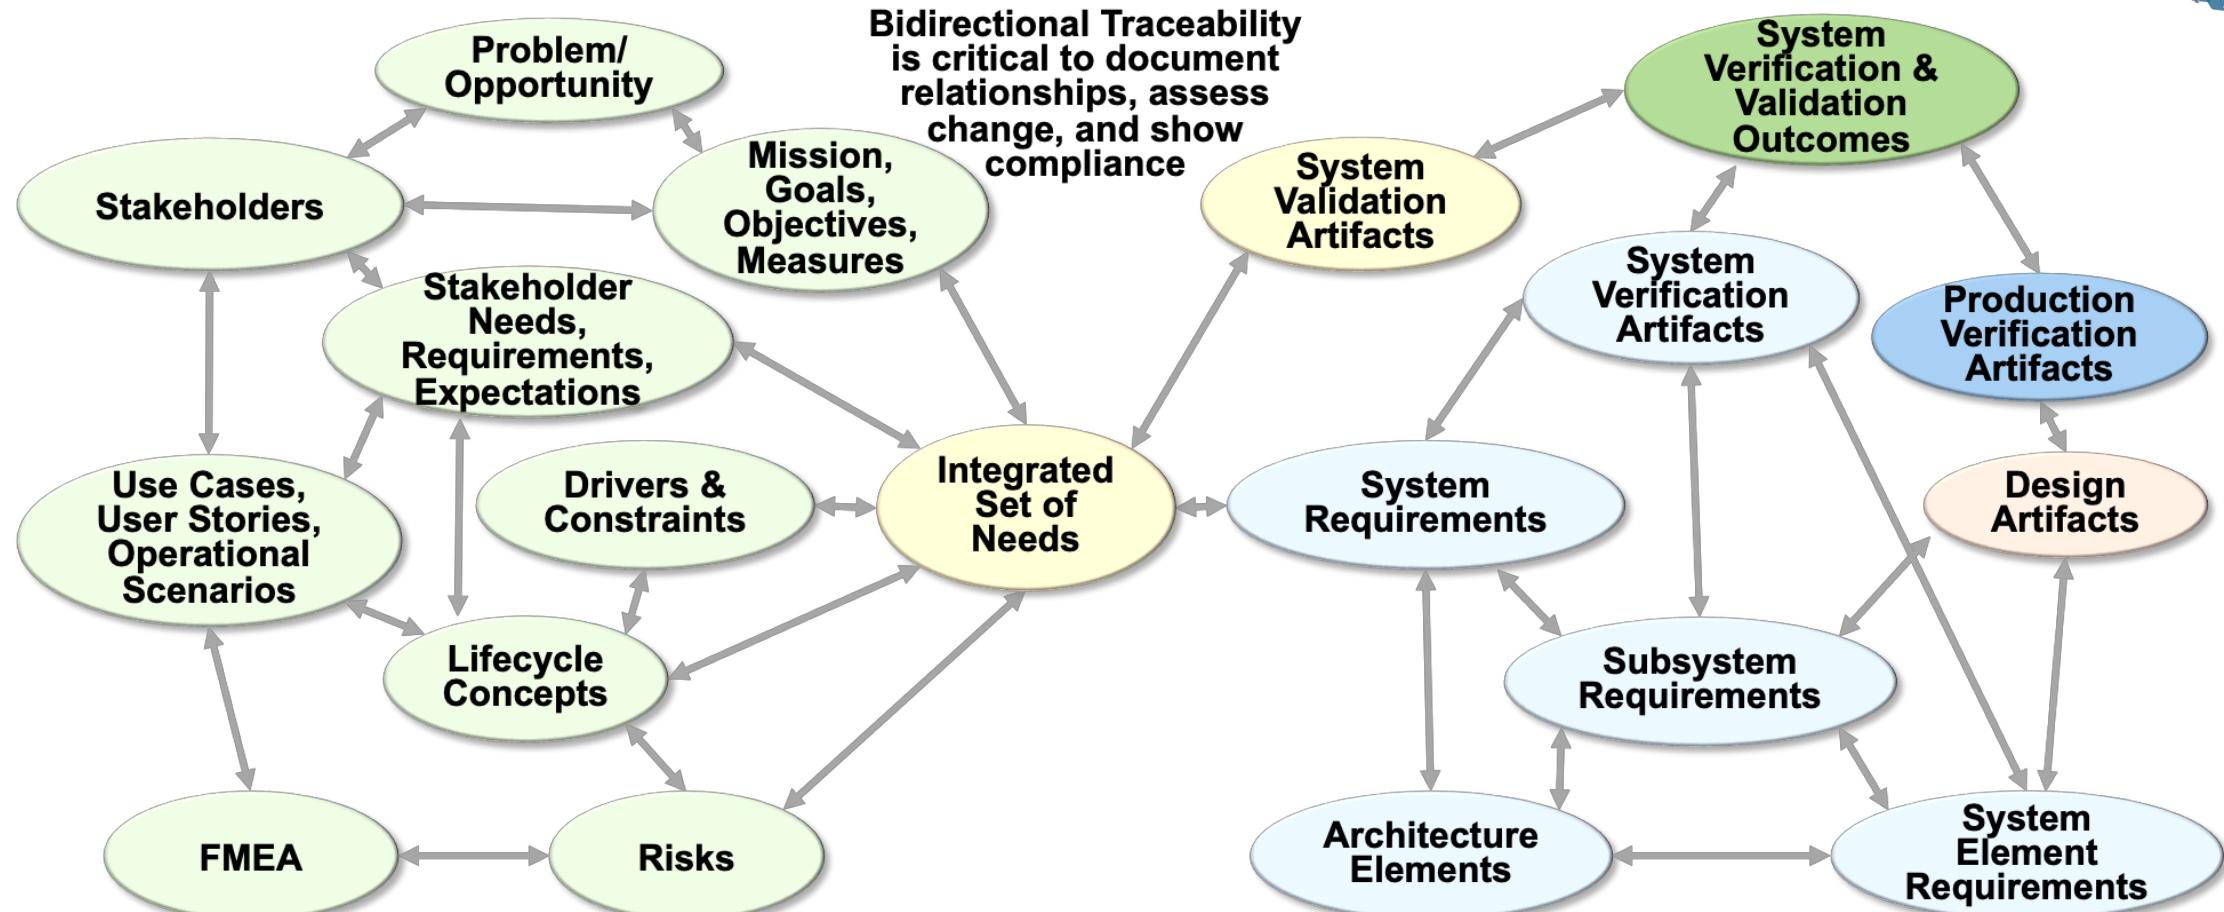

Original figure created by L. Wheatcraft. Usage granted per the INCOSE Copyright Restrictions. All other rights reserved.

Define a Traceability Relationship Meta-model at the beginning of the project and implement within the project toolset.

Managing Change to Ensure Consistency Across the Project Toolset

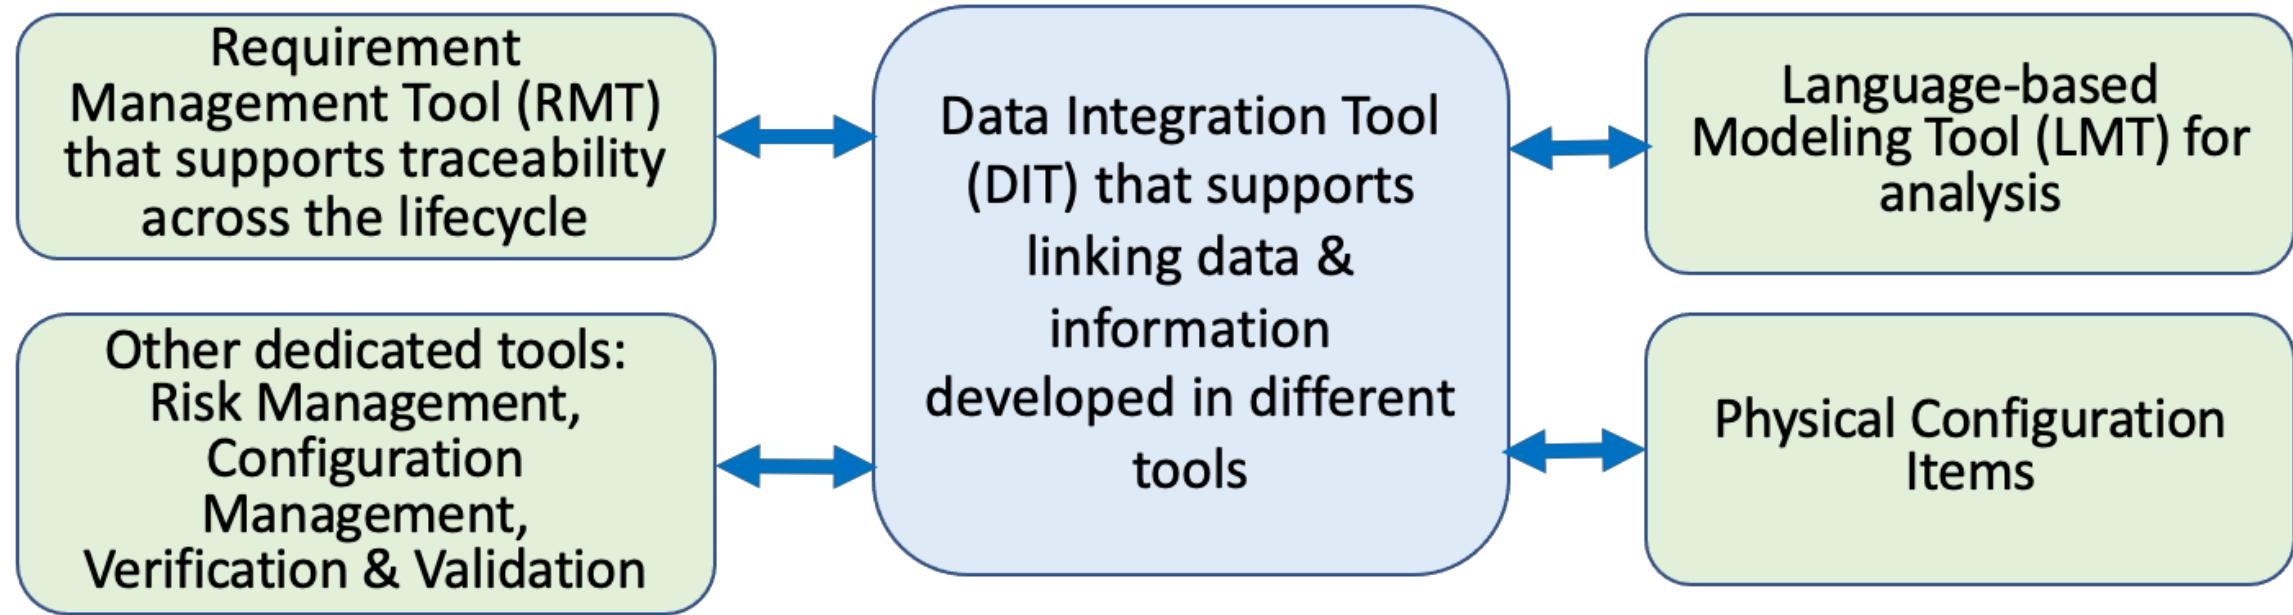

Original figure created by L. Wheatcraft. Usage granted per the INCOSE Copyright Restrictions. All other rights reserved.

Must establish the ability to share and link data between tools to ensure consistency and establish an ASoT.



Guidelines for Recording & Managing Traceability




Guidelines for Recording & Managing Traceability



- There is a range of tools available for establishing and managing traceability
 - Unless there is a small set of requirements, it is highly recommended that the project team uses an RMT or other application.
 - The tools used to establish traceability and create and manage traceability records should be identified at the beginning of the project, as traceability can quickly become complex; switching tools mid-project could present major challenges.
- When models are used as an analysis tool to identify needs and design input requirements, the tools in the project toolset need to enable traceability between requirements and the models from which they were derived, even if the data are defined and maintained within different software applications.
 - This is key to being able to maintain consistency and correctness of the needs and requirements no matter which tool is used to view them. This enables the ability to change a need or requirement in one tool and have that change reflected in the other tool, so there is an ASoT. Refer to NRM Chapter 16 concerning features a project toolset should have.
- Design input requirements are transformed from the integrated set of needs, the trace between the requirement and its related need should be established when the requirements are initially defined and recorded within the RMT.
- Child requirements created in response to an allocated parent requirement should establish a trace to its parent as it is initially defined and recorded within the RMT.

Traceability Relationship Meta-model

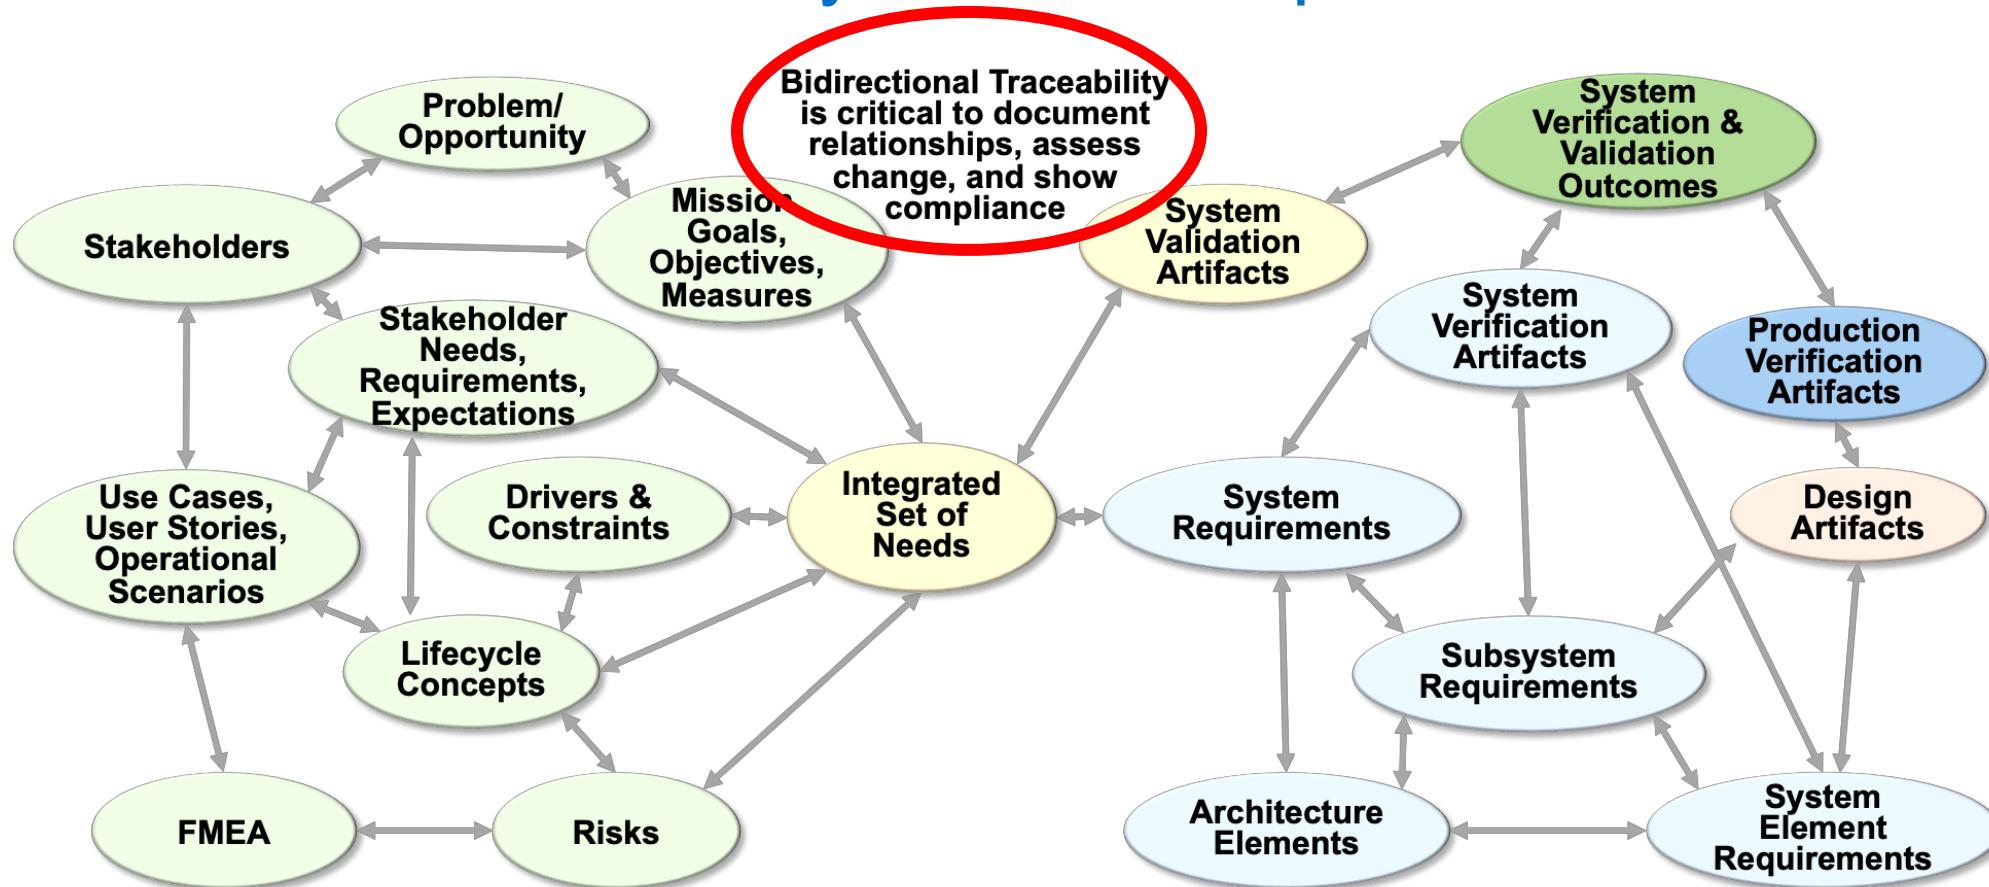

Original figure created by L. Wheatcraft. Usage granted per the INCOSE Copyright Restrictions. All other rights reserved.

Modern RMTs allow the project to define a traceability and dependency model within the tool and define rules concerning required traceability.

The tool will then enforce these rules, helping to minimize traceability issues.

Guidelines for Recording & Managing Traceability



- All requirements must trace to a need, a source, or a parent. Requirements that do not have this trace, are referred to as “orphan requirements”.
 - Even if the requirement does not trace to an allocated parent, there should be a source or need from which it was transformed. There should be no orphans.
- It is a best practice to define the system verification attributes when a requirement is defined.
 - Traceability to the system verification attributes should be established when the requirement is initially defined and recorded within the RMT (note that the verification data may exist in other applications in the digital ecosystem).
- It is also a best practice to trace requirements to the test cases within a verification plan or procedure that executes the system verification activity for that requirement.
- When a child requirement traces to multiple parents, needs, or sources, each trace must be assessed for its validity.
- The trace of all requirements to a parent, source, or need should be verified independently, if possible, to ensure that the requirements trace is correct during requirement verification.



Questions and Discussion

Lou Wheatcraft



- **Lou Wheatcraft** is a senior consultant and managing member of Wheatland Consulting, LLC. Lou is an international expert in systems engineering with a focus on needs and requirements development, management, verification, and validation across the system lifecycle.
- Lou's goal is to help systems engineers practice better systems engineering from a needs and requirements perspective across all life cycle stages of system/product development. Getting the needs and requirements right upfront is key to a successful project.
- Lou has over 50 years' experience in systems engineering, including 22 years in the United States Air Force. Lou has taught over 200 requirement seminars over the last 23 years. Lou supports clients from government and industries involved in developing and managing systems and products including aerospace, defense, medical devices, consumer goods, transportation, and energy.
- Lou is very active in the INCOSE and is the current chair of the RWG. Lou is a principal author of several RWG manuals and guides including the Needs and Requirements Manual (NRM), Guide to Needs and Requirements (GtNR), Guide to Verification and Validation (GtVV), and newly released version 4 of the Guide to Writing Requirements (GtWR).
- Lou has a BS degree in Electrical Engineering from Oklahoma State University; an MA degree in Computer Information Systems; an MS degree in Environmental Management; and has completed the course work for an MS degree in Studies of the Future from the University of Houston – Clear Lake.



**Requirements Working
Group**

A photograph of Earth from space, showing the planet's curvature. The horizon is visible, and the sun is positioned in the upper right corner, casting a bright glow and creating a lens flare effect. The Earth's surface is visible with some cloud cover and landmasses.

Thank you

Q&A Session

Please submit your questions in the Zoom's Q&A feature.

Join us on the upcoming *Calling All Systems!*

Requirements Renaissance: Designing Tomorrow's Systems Today

- Wednesday, 20 November 2024 at 11AM Eastern US
- Hosted by Tami Katz
- Registration link available at www.incose.org/events
- "Requirements Renaissance: Designing Tomorrow's Systems Today" delves into the transformation of requirements development, advocating for a paradigm shift in how we approach developing requirements when engineering complex systems.

Questions? Comments? Suggestions? Email us at webinars@incose.net!

Quick Reminders

- All the previous webinars are now located in the Professional Development Portal (PDP).
- Attending a Webinar does count as 1 PDU credit towards your SEP renewal

Questions? Comments? Suggestions? Email us at webinars@incose.net!

Thank you to our 2024 Webinar Sponsor!



Platinum Partner



© 2024 INCOSE. All rights reserved.

INCOSE.org